

HE

18.5

.A37

no.

DOT-

TSC-

UMTA-

73-15

v.3

UMTA-MA-06-0031-73, III

ELECTROMAGNETIC ENVIRONMENT MEASUREMENTS
OF PRT SYSTEMS AT 'TRANSPO®72"
VOLUME III
FORD SYSTEM

Earl E. Jamison



JANUARY 1974

FINAL REPORT

DOCUMENT IS AVAILABLE TO THE PUBLIC
THROUGH THE NATIONAL TECHNICAL
INFORMATION SERVICE, SPRINGFIELD,
VIRGINIA 22151.

Prepared for
DEPARTMENT OF TRANSPORTATION
URBAN MASS TRANSPORTATION ADMINISTRATION
OFFICE OF RESEARCH, DEVELOPMENT AND DEMONSTRATIONS
Washington DC 20590

NOTICE

This document is disseminated under the sponsorship of the Department of Transportation in the interest of information exchange. The United States Government assumes no liability for its contents or use thereof.

1. Report No. UMTA-MA-06-0031-73, III	2. Government Accession No.	3. Recipient's Catalog No.	
4. Title and Subtitle ELECTROMAGNETIC ENVIRONMENT MEASUREMENTS OF PRT SYSTEMS AT "TRANSPO [®] 72" VOLUME III - FORD SYSTEM.		5. Report Date January 1974	6. Performing Organization Code
7. Author(s) Earl E. Jamison		8. Performing Organization Report No. DOT-TSC-UMTA-73-15, III	
9. Performing Organization Name and Address National Scientific Laboratories, Inc. Westgate Research Park McLean VA 22101*		10. Work Unit No. (TRAIS) UM409/R4716	11. Contract or Grant No. DOT-TSC-375, 3
12. Sponsoring Agency Name and Address Department of Transportation Urban Mass Transportation Administration Office of Research, Development and Demon. Washington DC 20590		13. Type of Report and Period Covered Final Report Jan - Sep 1972	
14. Sponsoring Agency Code			
15. Supplementary Notes * under contract to Department of Transportation Transportation Systems Center, Kendall Square, Cambridge MA 02142			
16. Abstract <p>An X-Y plot is made of the radiated Electromagnetic signals and noise between 1KHz and 50KHz at each of the four Personalized Rapid Transit (PRT) sites at Dulles International Airport. The PRT systems were operated individually to establish the signal characteristics of each system. A spectrum analyzer was used to view the frequency spectrum broadband prior to recording and a Polaroid scope camera was used in conjunction with the spectrum analyzer to photograph signals between 50KHz and 50MHz. This frequency range was sufficiently broad to cover all command and control frequencies of the four PRT systems.</p> <p>The purpose of the measurements program was to establish some base line information on the electromagnetic signal characteristics in the Dulles area in the event there was an interaction between the PRT Command and Control systems and the Federal Aviation Administration Air Traffic Control equipment.</p> <p>The measurements obtained during this series of tests will be used for a comparison with data obtained with no PRT systems operating and later with all four systems operating simultaneously.</p>			
17. Key Words Operating Individually, Radiated, Personalized Rapid Transit, Electromagnetic Signals		18. Distribution Statement DOCUMENT IS AVAILABLE TO THE PUBLIC THROUGH THE NATIONAL TECHNICAL INFORMATION SERVICE, SPRINGFIELD, VIRGINIA 22151.	
19. Security Classif. (of this report) Unclassified	20. Security Classif. (of this page) Unclassified	21. No. of Pages 56	22. Price



PREFACE

The work described in this report was performed as part of a test program conducted to evaluate the Safety and Performance characteristics of the four Personalized Rapid Transit Systems (PRT) on display at Transpo[®] 72. Sponsored by the U.S. Department of Transportation, Transpo[®] 72 was the first United States International Transportation Exposition and was intended to demonstrate to the general public new technologies in transportation.

The PRT demonstration program was the responsibility of the Urban Mass Transportation Administration (UMTA) and was conducted to provide detailed engineering test data in addition to providing mature candidates for an Urban demonstration.

RADIATED FIELD NOISE MEASUREMENTS

FORD SYSTEM - TRANSPO® '72

1. INTRODUCTION

This technical report presents the data obtained in the performance of tests for radiated field noise at the personal rapid transit (PRT) system of FORD at TRANSPO® '72 - Dulles Airport, Washington, D. C. This report covers one of the four tests defined under Item 2 of Contract DOT-TSC-375, and as performed by National Scientific Laboratories.

Item 2 calls for the performance of radiated field noise measurements from each PRT system in the frequency range from 1 KHz to at least 50 MHz with one PRT system on. The objective of the test was to gather operational data for each of the PRT systems. Such data will enable characterization of the noise increase attributable to system operation, when considered in comparison with the ambient data collected and documented* previously by NSL.

The measurements reported in this document were made during the forenoon of August 1, 1972.

* Technical Report, Item 1, Ambient Radiated Field Noise Survey, PRT Systems - TRANSPO® '72, March 1972, Contract DOT-TSC-375 Department of Transportation, Transportation Systems Center, 55 Broadway, Cambridge, Massachusetts 02142

2. METHOD OF MEASUREMENT

All measurements were made using test setups and instruments as nearly identical as possible to those used during ambient testing.

2.1 Instruments

The measurements made in the frequency range from 1 KHz to 50 KHz were performed using a Fairchild Model EMC-10 Interference Analyzer. This device is a battery-operated calibrated RFI/EMI meter, which, when operated as a narrowband tunable device, covers the frequency range from 1 KHz to 50 KHz. The receiver incorporates a meter circuit of such design that signal levels are expressed in decibels on a linear scale. In addition, the receiver incorporates circuitry providing buffered voltage outputs in proportion to meter indication and tuned frequency. A Hewlett Packard Model 3005B X-Y Plotter was driven from the receiver.

Signals were obtained from the electro-magnetic environment by use of either a Fairchild PEF-10 Electric Field Antenna or a Fairchild ALP-10 Magnetic Field Antenna. Both of these antennas are directional in the horizontal plane, therefore, measurements were made for North/South and East/West orientations.

The measurements made in the 50 KHz to 60 MHz frequency range were performed using Hewlett Packard Model 8552/8553A

Spectrum Analyzer. The analyzer is an extremely versatile instrument in that it has numerous frequency scan and bandwidth settings throughout the frequency spectrum of a few cycles up to 100 MHz. The analyzer was used in four frequency bands 50 KHz to 100 KHz, 100 KHz to 1.1 MHz, 1 MHz to 21 MHz, and 10 MHz to 60 MHz. Data was recorded photographically with a Hewlett Packard Model 198A oscilloscope camera.

Signals were obtained from the electro-magnetic environment in the 50 KHz to 21 MHz frequency range by using an NSL verticle top loaded whip electric field antenna mounted on a cathode follower. This antenna is non-directional in the horizontal plane. In the 20 MHz to 60 MHz frequency range, an EMCO Model 3104 biconical electric field antenna was utilized. This antenna is directional in the horizontal plane, therefore, measurements were made in the North/South and East/West orientations.

During the tests, the various antennas were attached to the top of a mast mounted on the NSL instrumentation van. An antenna rotator was incorporated in the antenna mast to enable rotation in azimuth. The antenna height was approximately 12 feet above ground.

The various instruments received a.c. power from a motor generator positioned 150 feet from the van.

2.2 Test Sites

The test sites used during the performance of the measurements were the same locations as denoted in the Item 1 report

for the ambient noise tests. The sites are numbered 1 through 11 for the entire PRT area. Sites 1, 3 and 4 are located at the FORD system as shown in the map, Figure 1. A complete set of measurements was obtained at each site - magnetic field, 1 KHz to 50 KHz, and electric field, 1 KHz to 60 MHz.

2.3 Measurement Technique

Data were obtained in the 1 KHz to 50 KHz frequency range by scanning manually the EMC-10 receiver, using a 50 Hz bandwidth setting. Two recordings have been made for each antenna (magnetic field, electric field) in two orientations (North/South, East/West). The scanning time per recording averaged four to six minutes.

The magnetic field recordings, denoted as MSR type test on the charts, are reproduced in the Appendix as the upper half of pages A-2 to A-5, A-15 to A-18 and A-28 to A-31. The dB scale refers to the level at the instruments input connector. Some of the charts have two amplitude scales. Located somewhere along the bottom of the chart is an upside down letter "Y" which denotes the point of changeover from the scale on the left side to the scale on the right side. The lower chart on each page is a plot of approximately one level in each major frequency increment of the chart directly above it. Peaks were selected whenever available. A correction factor for the antenna (antenna amplitude response is non-linear with frequency) has been included in the levels plotted in the lower graphs. In the upper

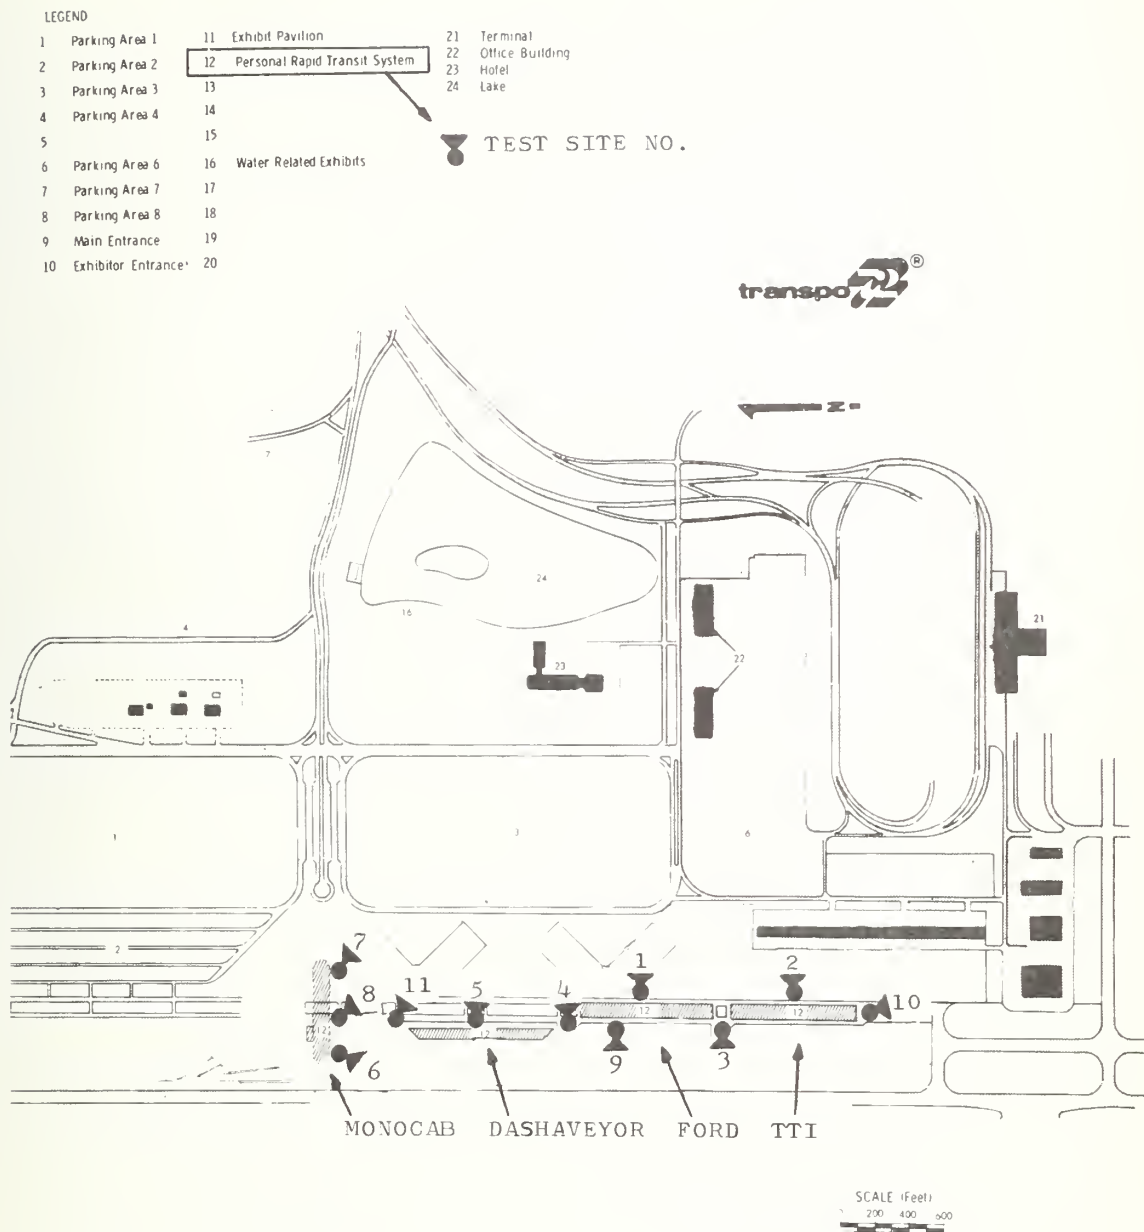


FIGURE 1. PRT TEST SITE LOCATIONS

charts, noise peaks recorded in the top major amplitude division are out of the calibrated range of the instrumentation system. Thus, the levels plotted for peaks that enter the upper division are plotted as having an amplitude of the highest level indicated numerically on the chart for that particular frequency.

The electric field chart recordings, denoted as ESR type test on the charts, are reproduced in the Appendix on Pages A-6 to A-9, A-19, to A-22, and A-32 to A-35. Some of these charts also have two amplitude scales, and they are used in the same manner as described for the magnetic field recordings. In addition, noise peaks recorded in the top major amplitude division are out of the calibrated range of the system.

Electric field data for the 50 KHz to 60 MHz frequency range were obtained as photographic recordings of spectrum analyzer amplitude/frequency CRT displays. Two recordings have been made for each frequency band - 50 KHz to 100 KHz, 100 KHz to 1.1 MHz, and 1 MHz to 21 MHz. A non-directional antenna was used for the above frequencies. Four recordings were obtained for the 10 MHz to 60 MHz frequency band for which a directional antenna was employed, therefore, two recordings were made for North/South orientation, and two recordings for East/West orientation. The antenna employed for the first three frequency bands has a constant correction factor for all frequencies, and this is included in the amplitude designations for the recorded data. The antenna employed for the high frequency

band has a nearly constant correction factor above 20 MHz, and this factor has been included in the amplitude designations for the recorded data. Thus, the calibration levels given by the side of the photograph do not apply to frequencies from 10-20 MHz. The photographic recordings are reproduced in the Appendix on Pages A-10 to A-14, A-23 to A-27, and A-36 to A-40.

3. INTERPRETATION OF DATA

Radiated field measurements have been made at three test sites at the FORD installation. The data are contained in Appendix A. No notations are given with the data as no vehicle functions could be directly correlated with any signal peaks. Thus, the data can be compared with the ambient data to determine and increase its radiation levels.

4. TIME LOG

FORD has only one vehicle running during the test period of 0800 to 1200. The log of events is contained in the Appendix on pages A-41 to A-43.



APPENDIX A

RADIATED FIELD MEASUREMENTS DATA

This appendix contains the data obtained during the various tests performed. The data is not presented in numerical sequence as the tests were performed, but rather by site location number from south to north - Site No. 3, 1 and 4. Further, the data are arranged in the following manner - first, magnetic field charts, then electric field charts and photographs in order of frequency progression. Data is contained herein for Test No's. 366 to 378, 351 to 363 and 379 to 391.



A Time Log of events for PRT vehicle operations is contained on pages A-41 to A-43.

TEST NO. 368
TEST SPECIMEN 8-6-3

TEST TYPE MSR F/W
TEST EQUIP. INC 10

BANDWIDTH 50 Hz
DATE 8-1-72

1000
83

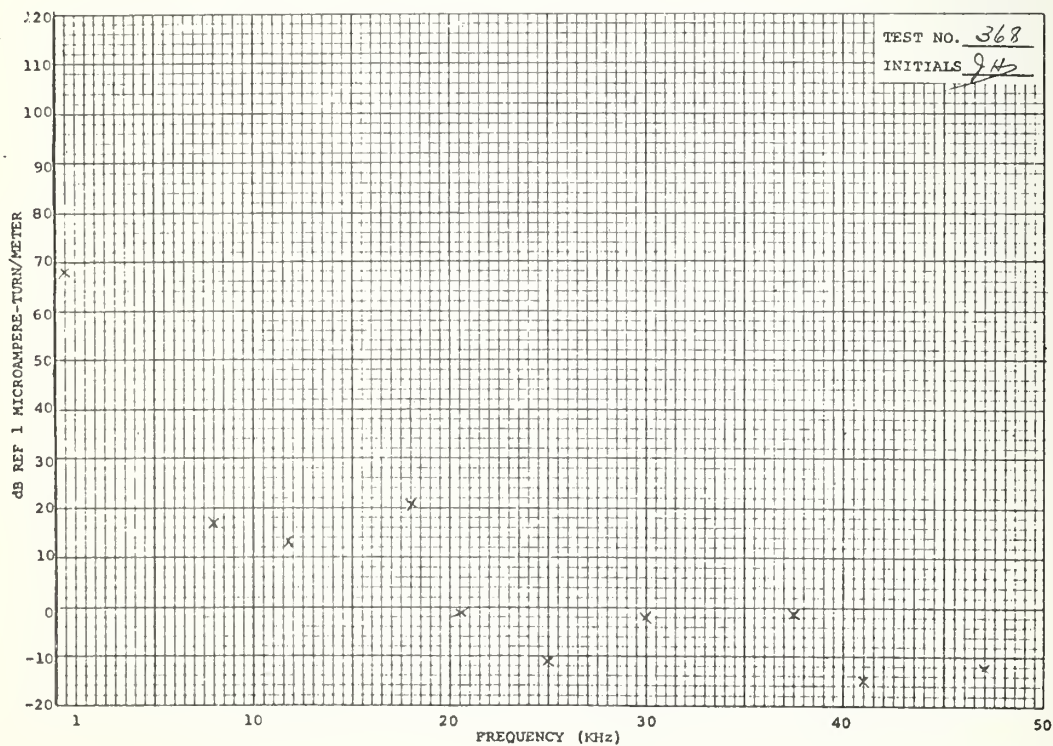
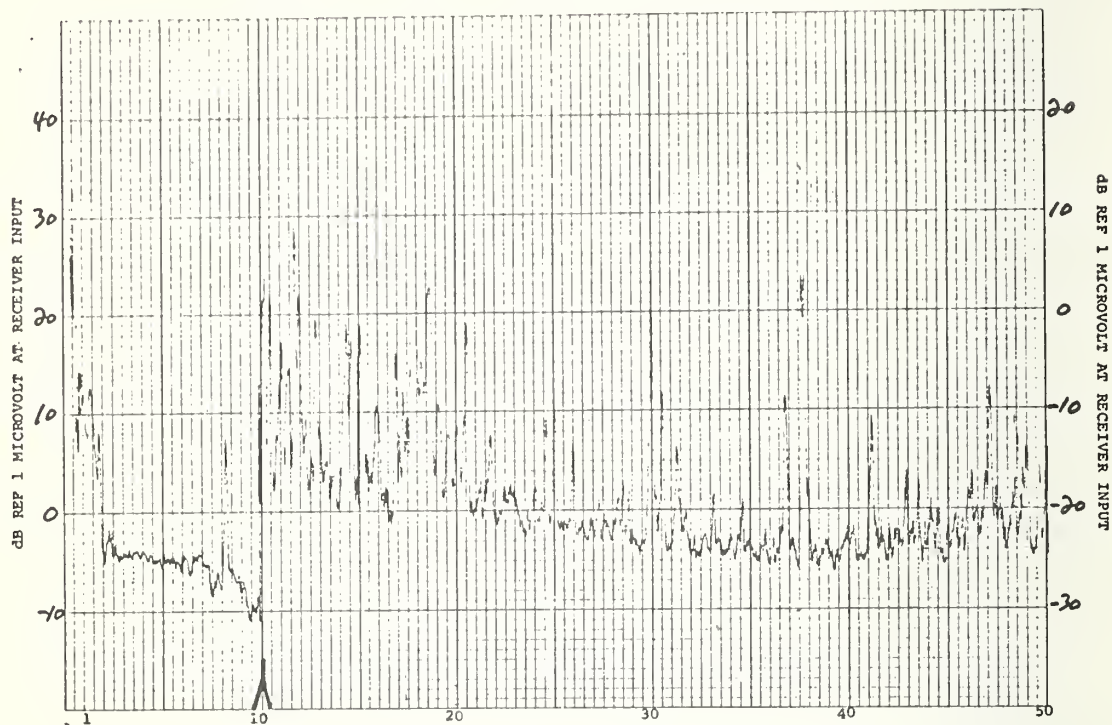


TEST NO. 369
TEST SPECIMEN 305

TEST TYPE MSR F/LI
TEST EQUIP. FM-10

BANDWIDTH 50 Hz
DATE 8-1-72

1003
EST

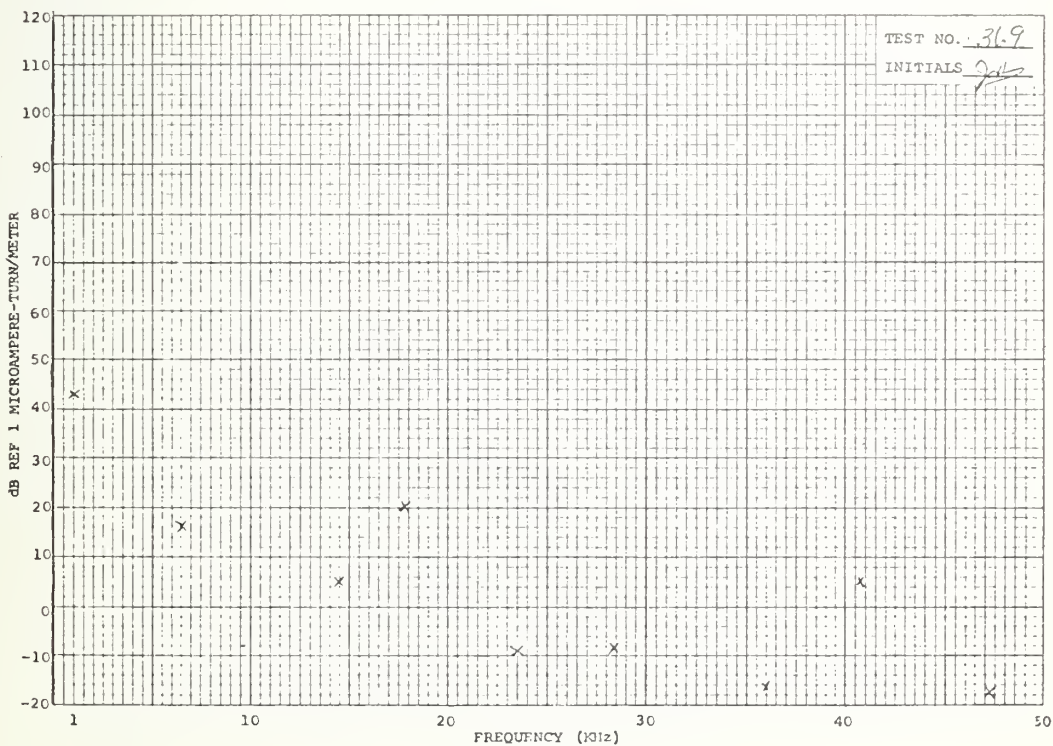
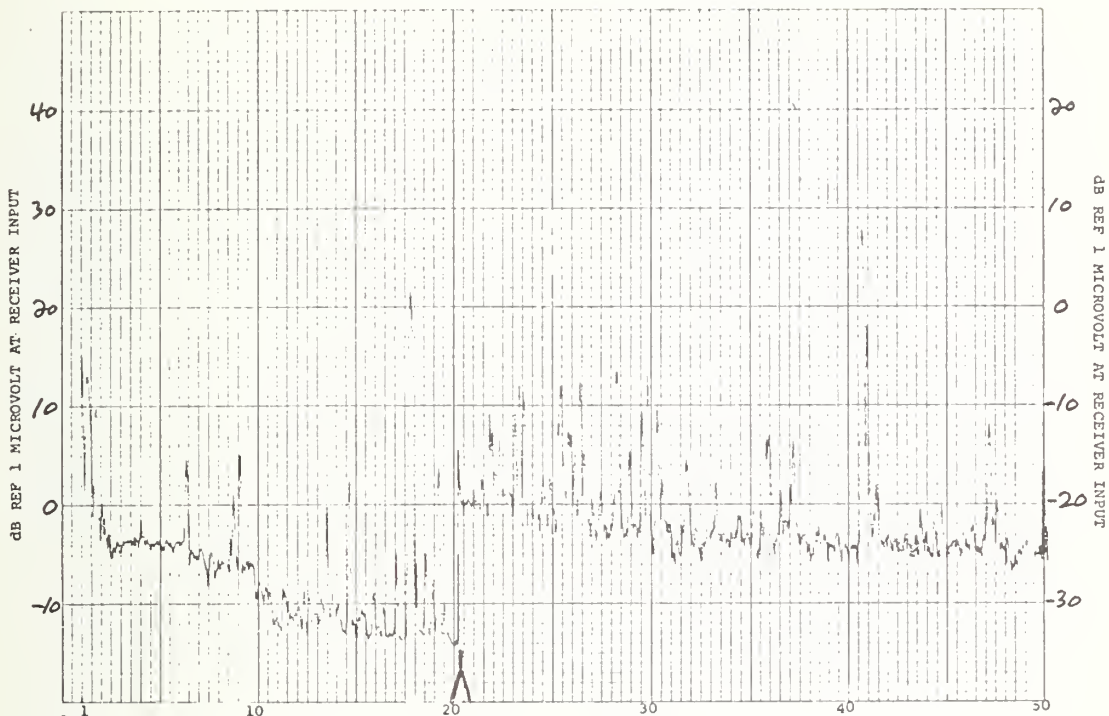


TEST NO. 366
TEST SPECIMEN 866

TEST TYPE MSR N/S
TEST EQUIP. LMC 10

BANDWIDTH 50 Hz
DATE 8-1-72

0954
89

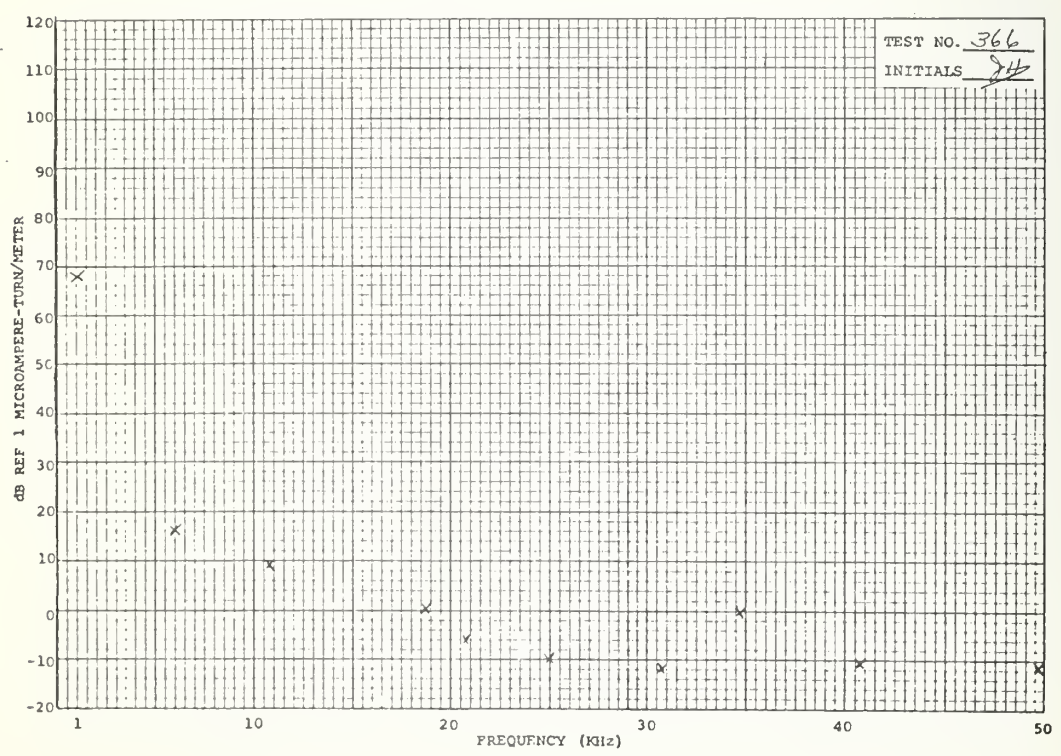
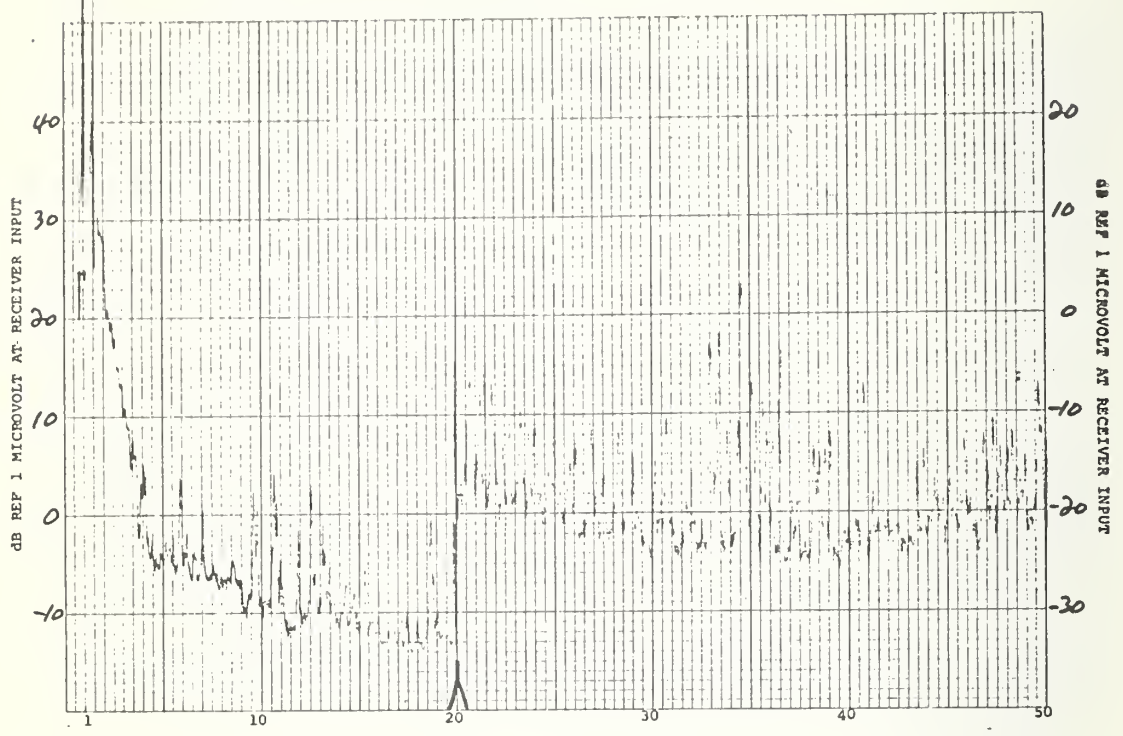


TEST NO. 367
TEST SPECIMEN 263

TEST TYPE MSR N/S
TEST EQUIP. PMC 10

BANDWIDTH 50Hz
DATE 8-1-77

0956
EG

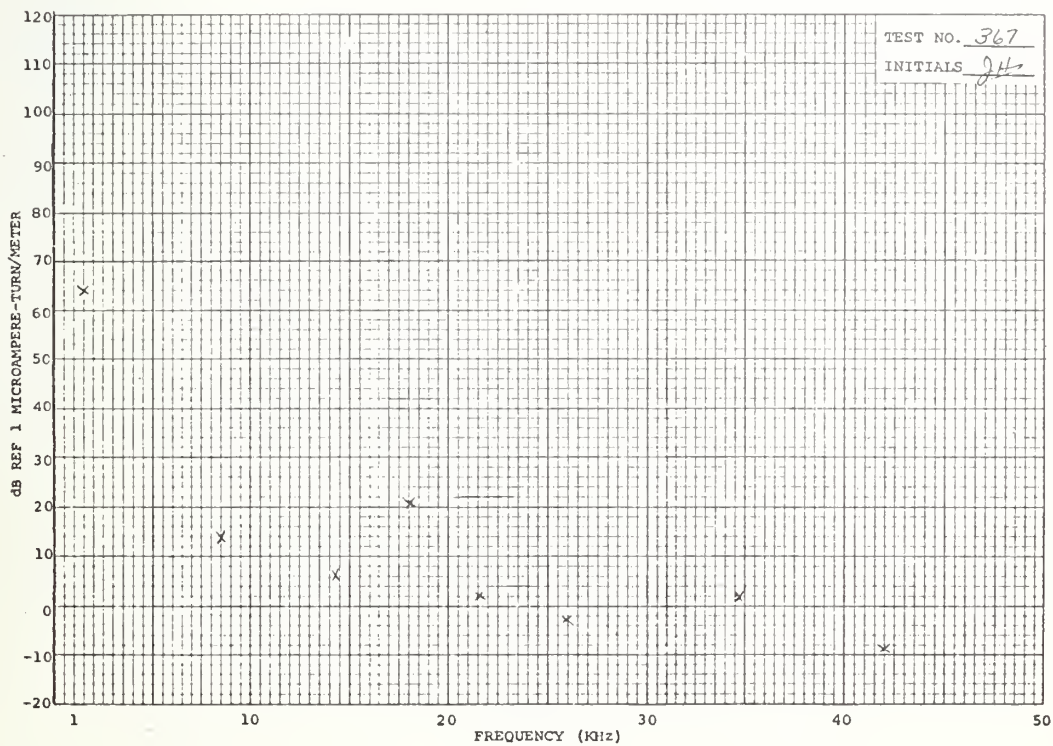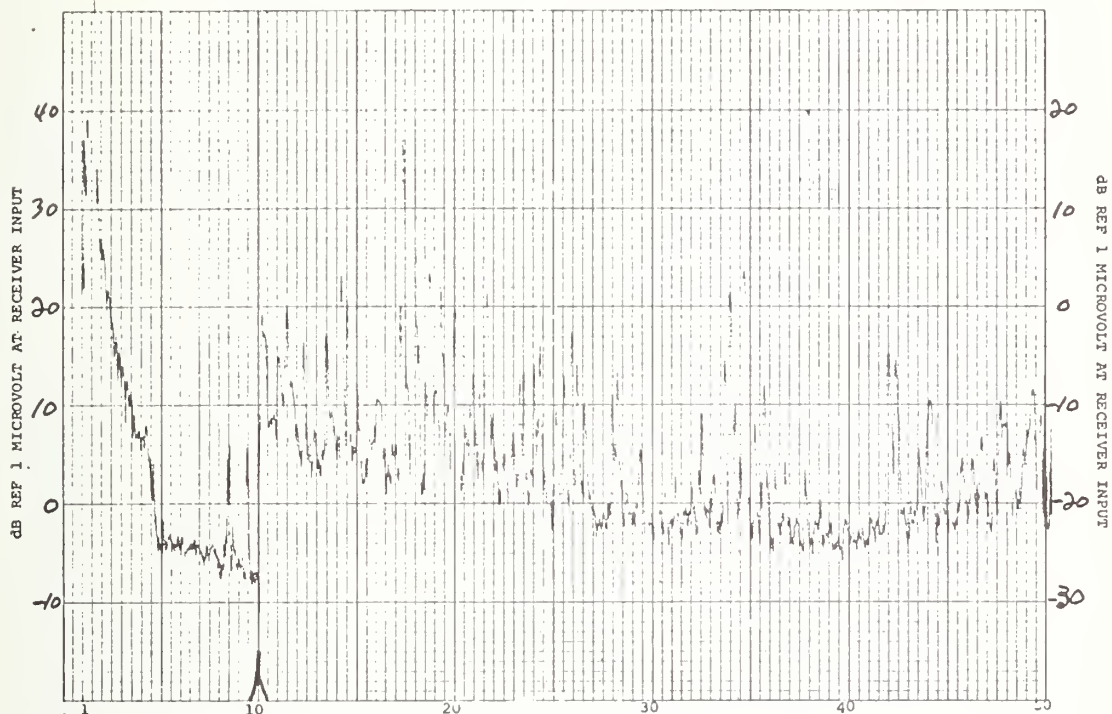


1009
E2


BANDWIDTH 50 Hz
DATE 8-1-72

TEST TYPE ESD E/W
TEST EQUIP. EMC-10

TEST NO. 370
TEST SPECIMEN 8.6.3

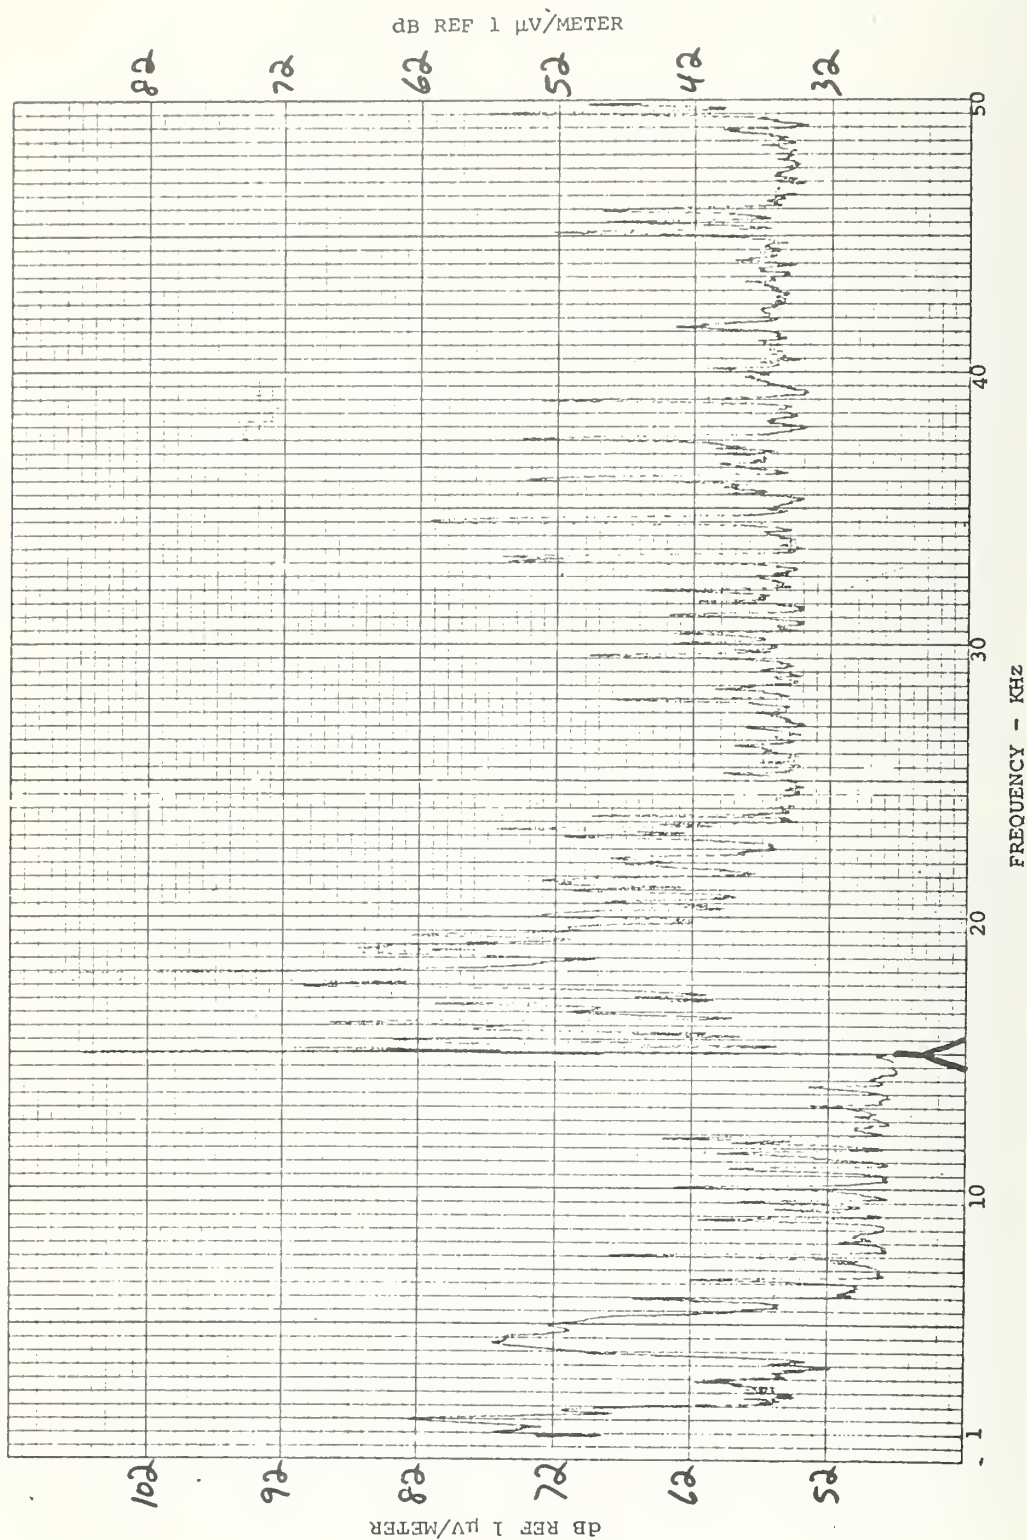

TEST NO. 371 TEST TYPE ESR E/W BANDWIDTH 50 Hz 1012
 TEST SPECIMEN 863 TEST EQUIP. EMC-10 DATE 8-1-72 EE

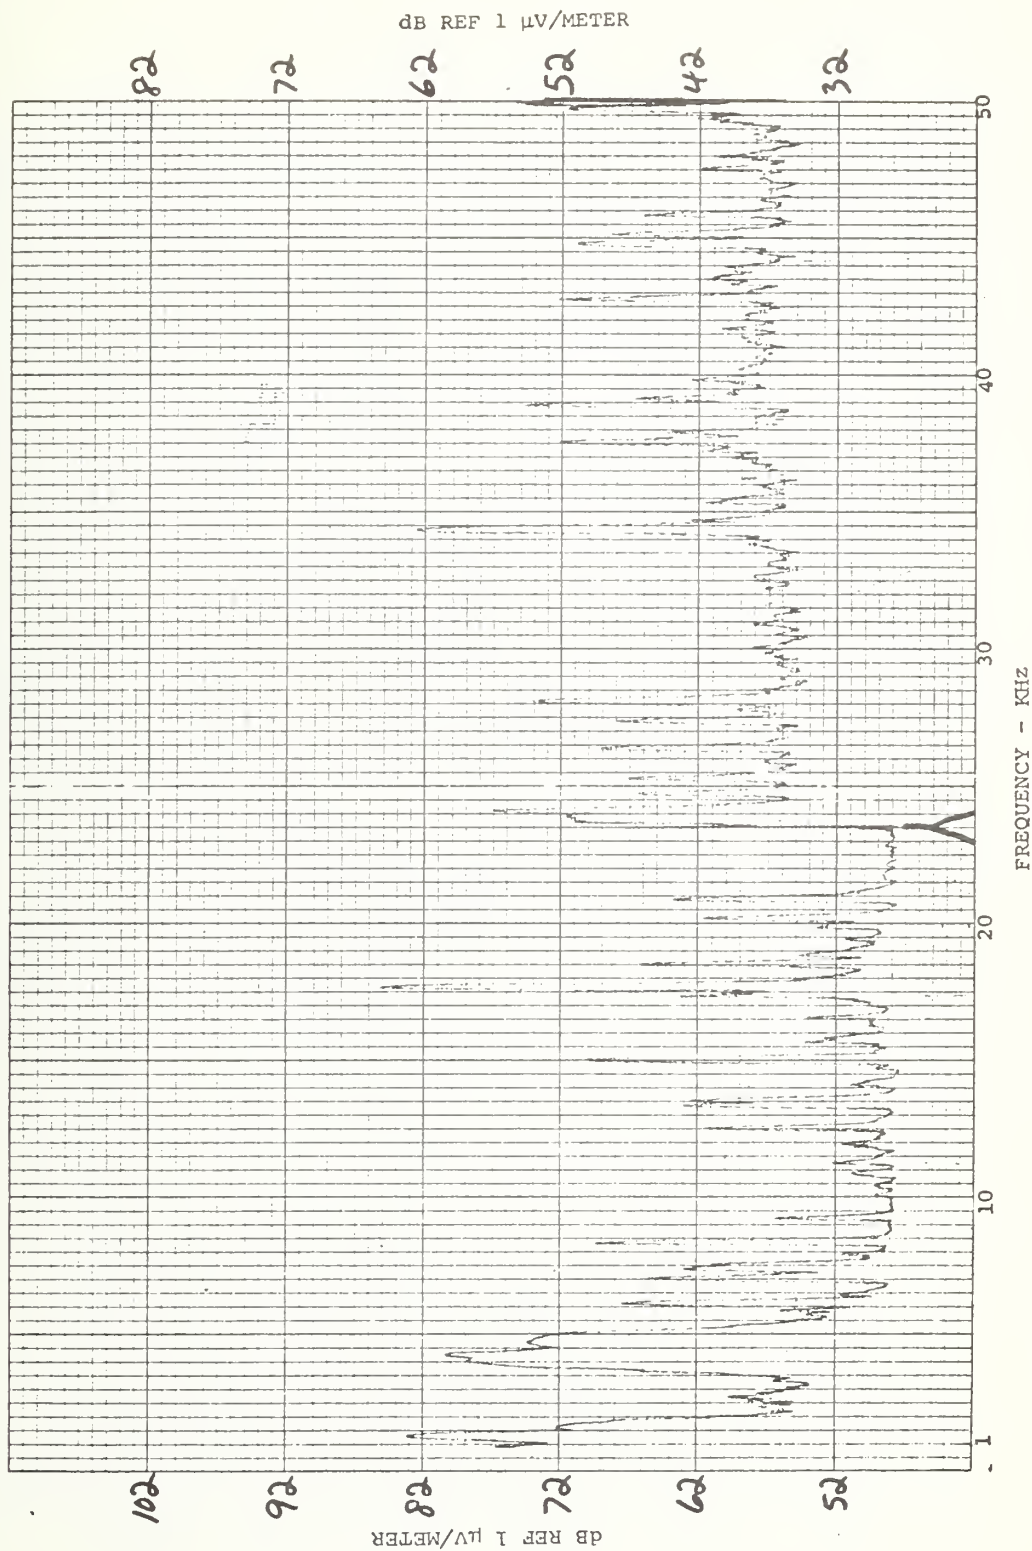


TEST NO. 372
TEST SPECIMEN 263

TEST TYPE ESR N/S
TEST EQUIP. EMC-10

BANDWIDTH 50 Hz
DATE 8-1-72

1015
89

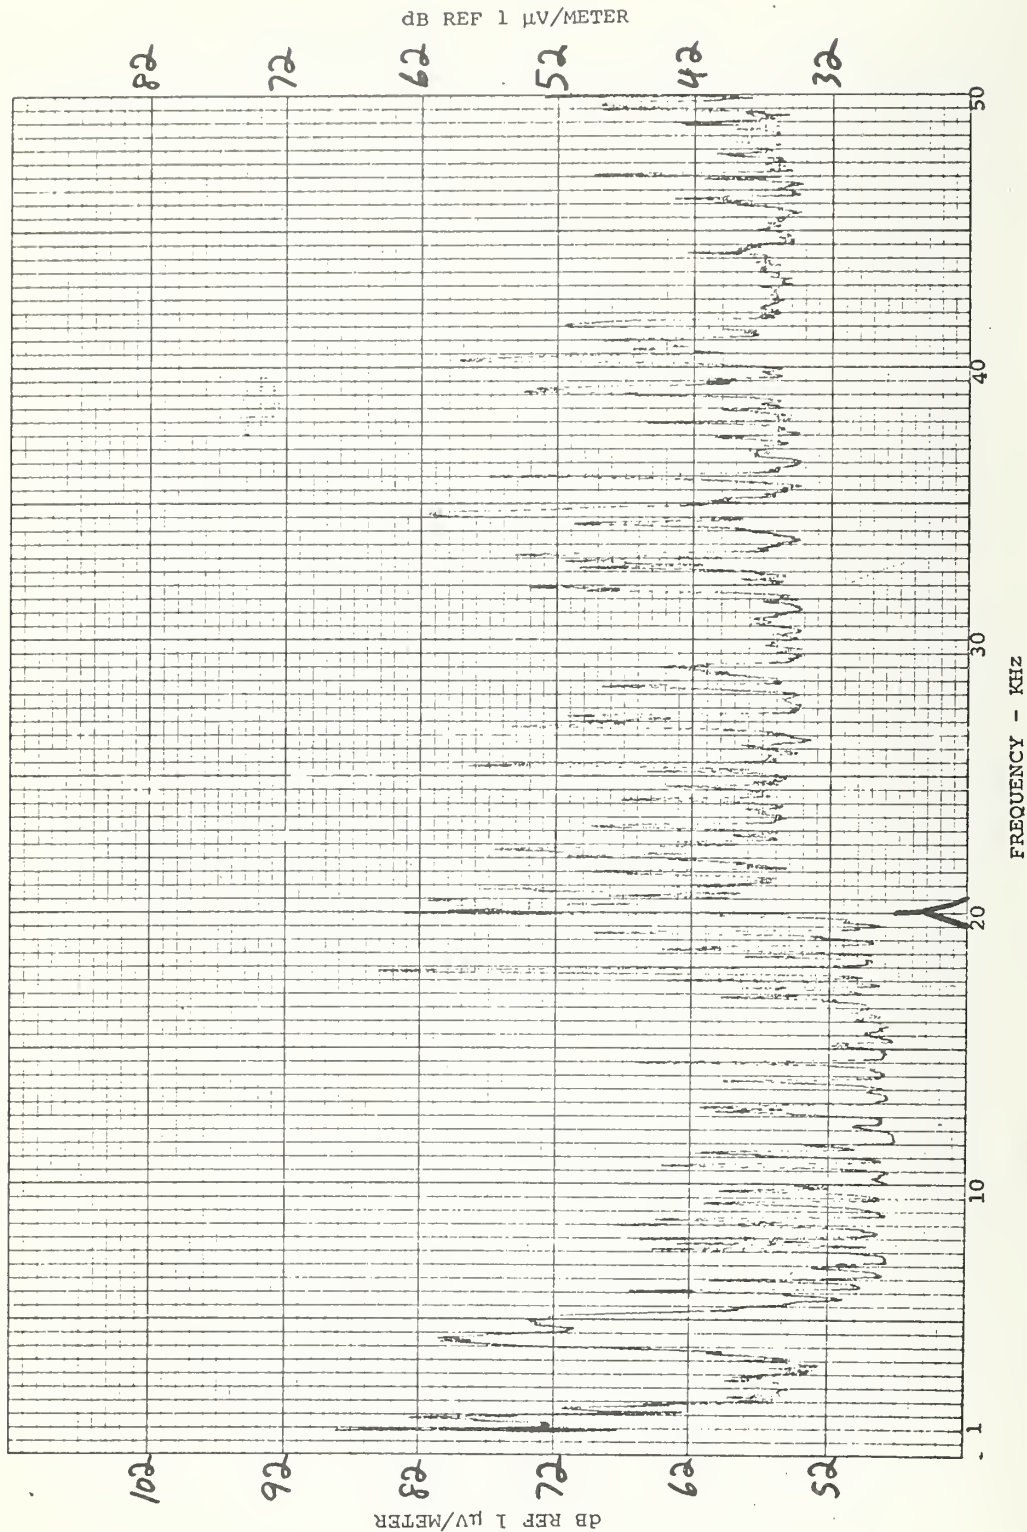


TEST NO. 373
TEST SPECIMEN Site 3


TEST TYPE ESR N/S
TEST EQUIP. ENC-10

BANDWIDTH 50Hz
DATE 8-1-72

1018
SSJ

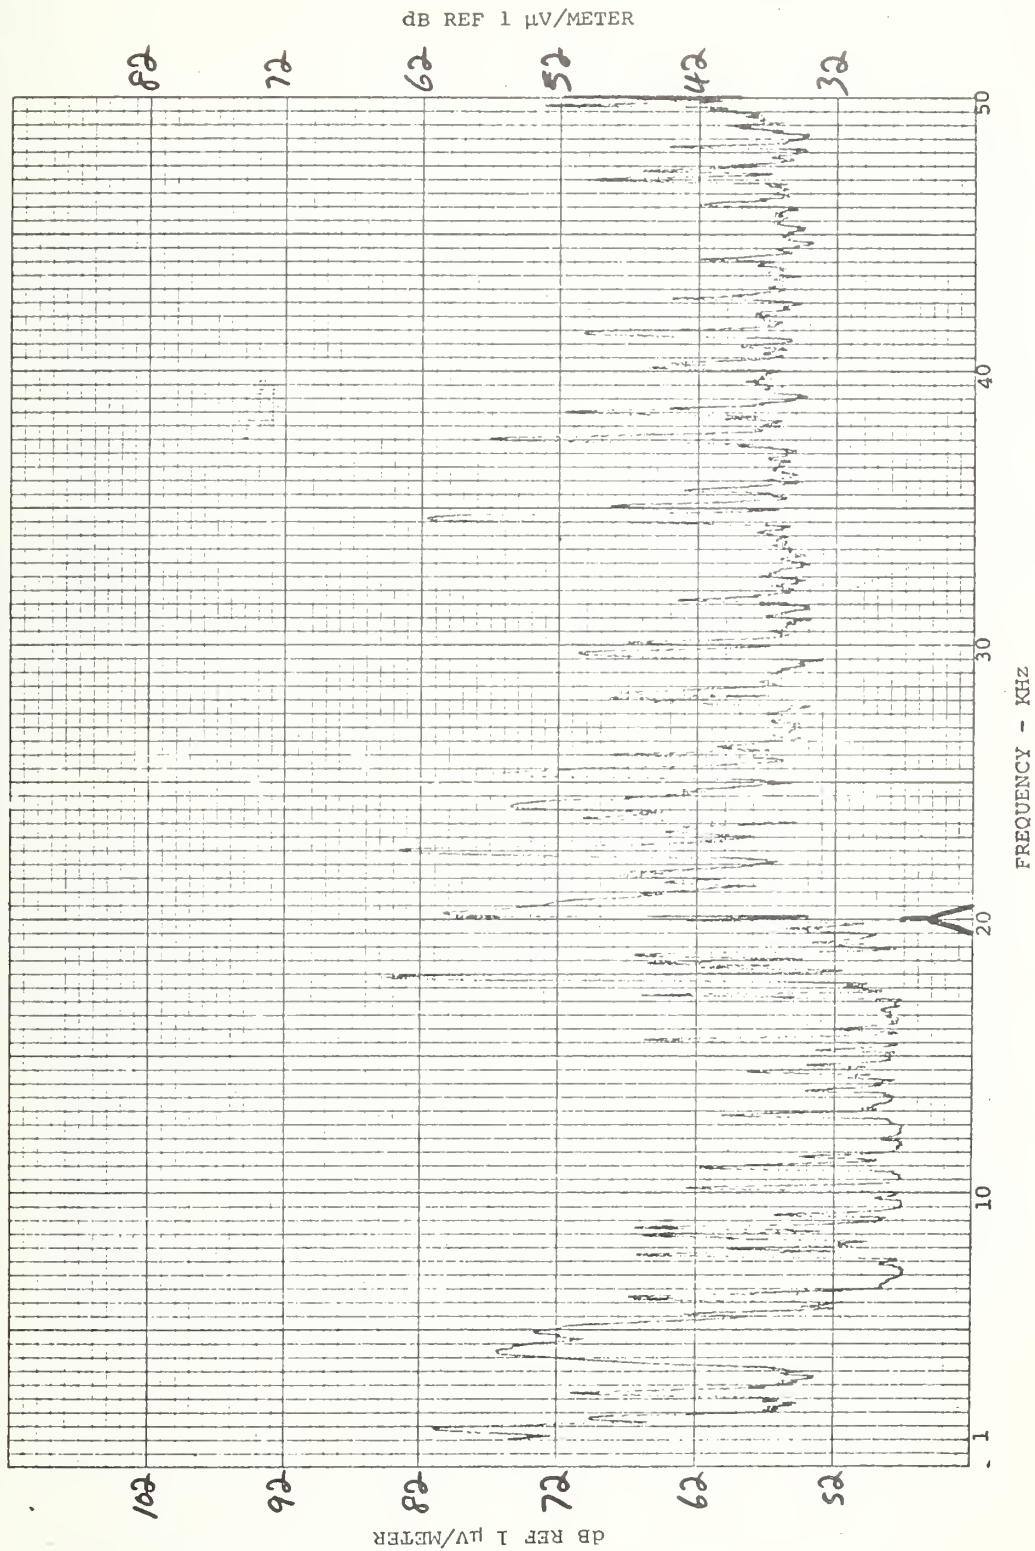

LOCATION: SITE 3 TYPE TEST ESR DATE 8-1-72

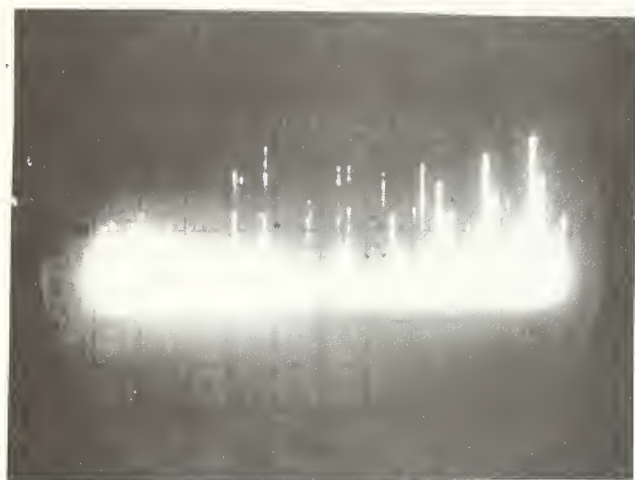


153
133
113
93
73

dB REF 1 μ V/METER/MHz

TEST 374
TIME 1027

FREQ. SCAN: 5 KHz/Div.

Bandwidth: 10 KHz

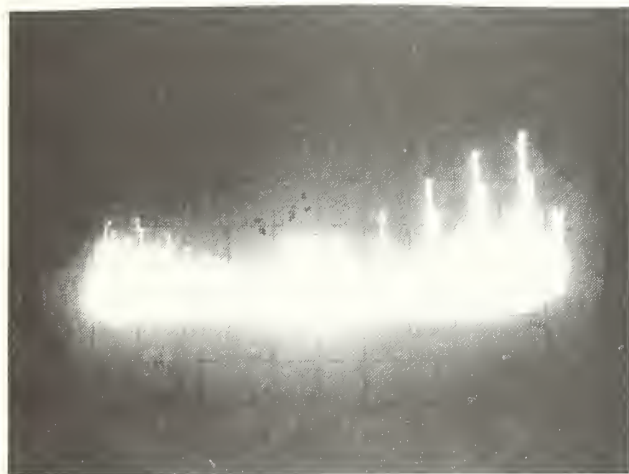


153
133
113
93
73


dB REF 1 μ V/METER/MHz

TEST 374
TIME 1027.5

LOCATION: SITE 3 TYPE TEST ESR DATE 8-1-72

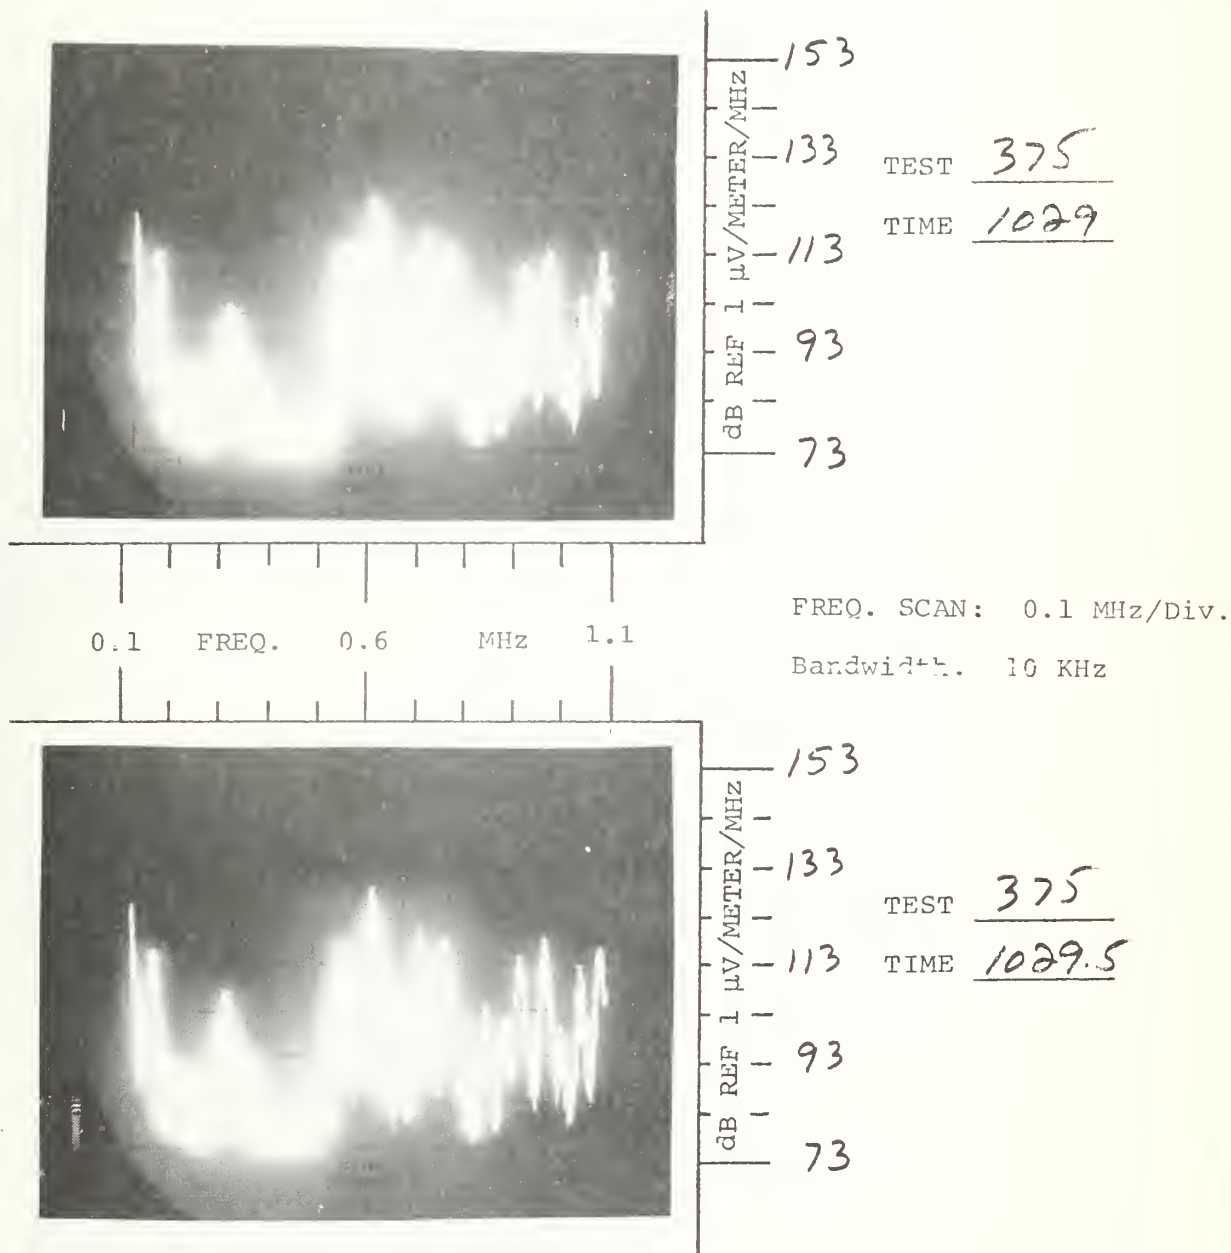

LOCATION: SITE 3 TYPE TEST ESR DATE 8-1-72

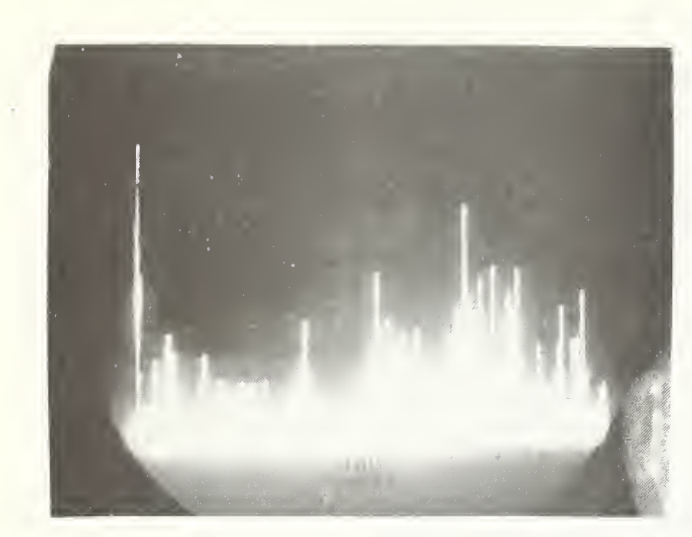


153
133
113
93
73
dB REF 1 μ V/METER/MHz

TEST 376
TIME 1033

1 FREQ. 11 MHz 21

FREQ. SCAN: 2MHz/Div.



Bandwidth: 10 KHz

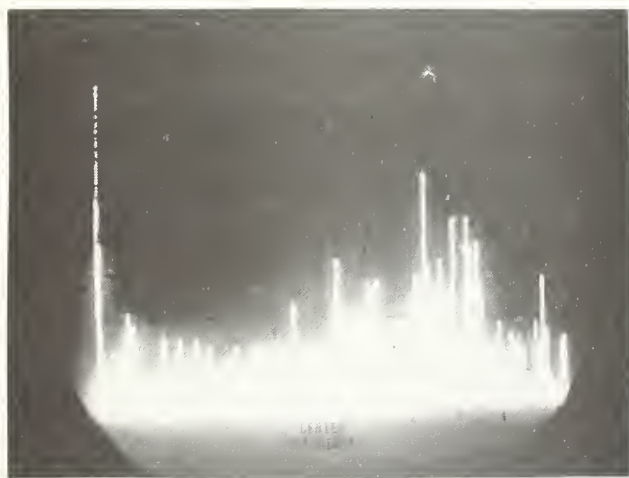



153
133
113
93
73
dB REF 1 μ V/METER/MHz

TEST 376
TIME 1033.5

LOCATION: SITE 3 TYPE TEST ESR E/W DATE 8-1-72

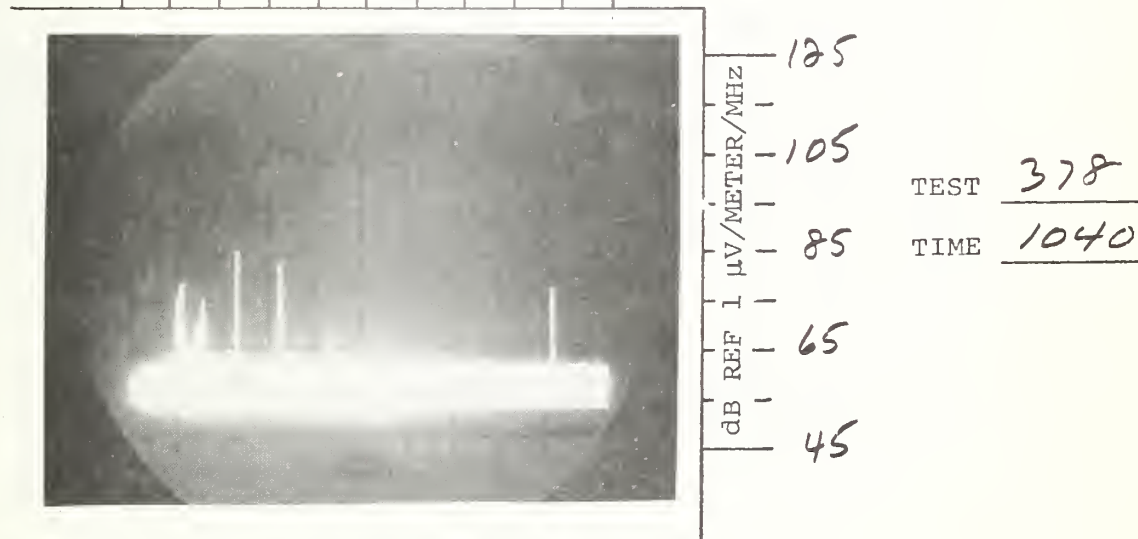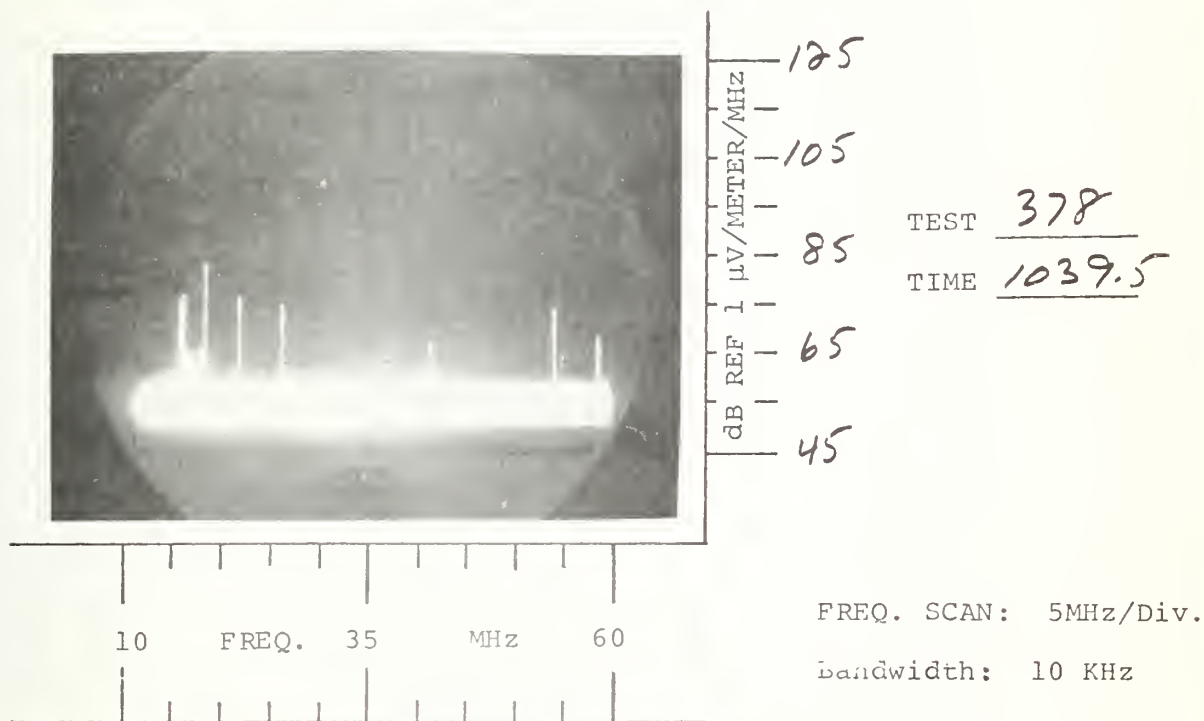

LOCATION: SITE 3 TYPE TEST ESR N/S DATE 8-1-72

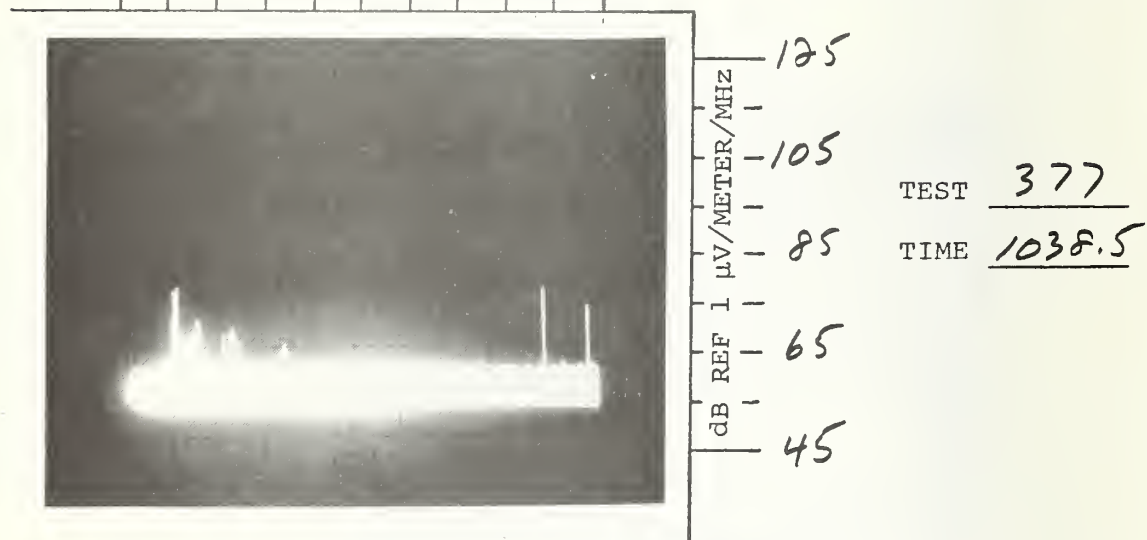
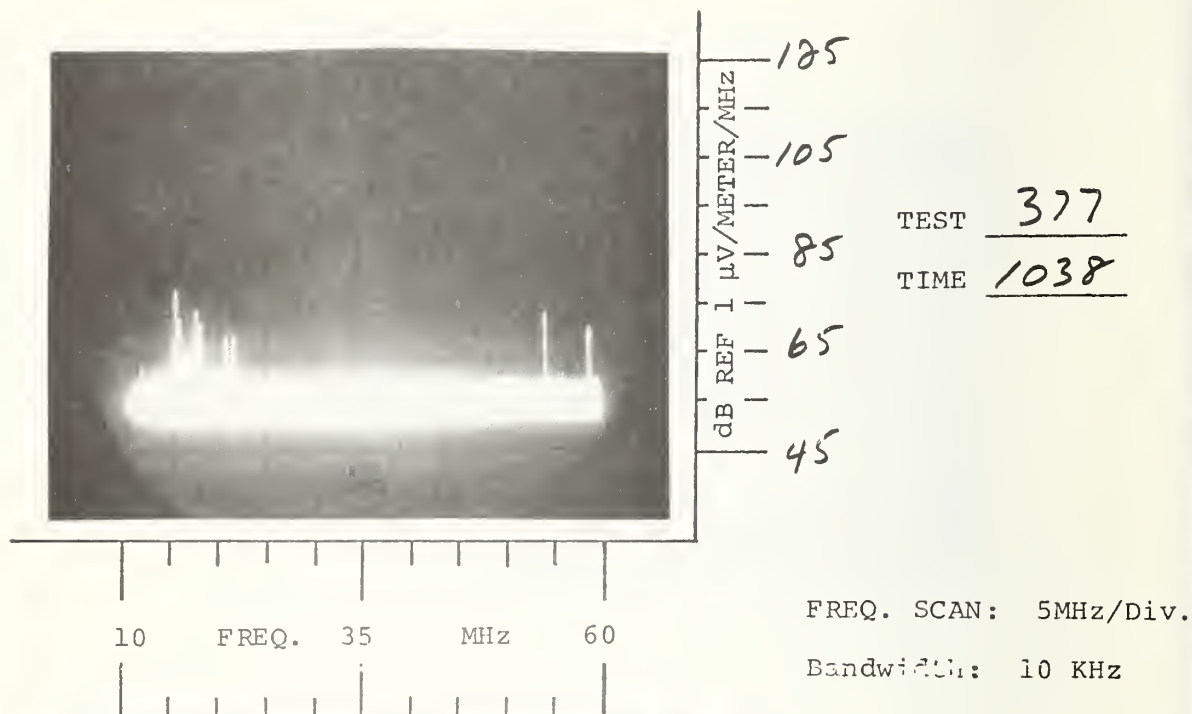


TEST NO. 360
TEST SPECIMEN 801

TEST TYPE MSR E/W
TEST EQUIP. EMC-12

BANDWIDTH 50Hz
DATE 8-1-72

0908
FFJ

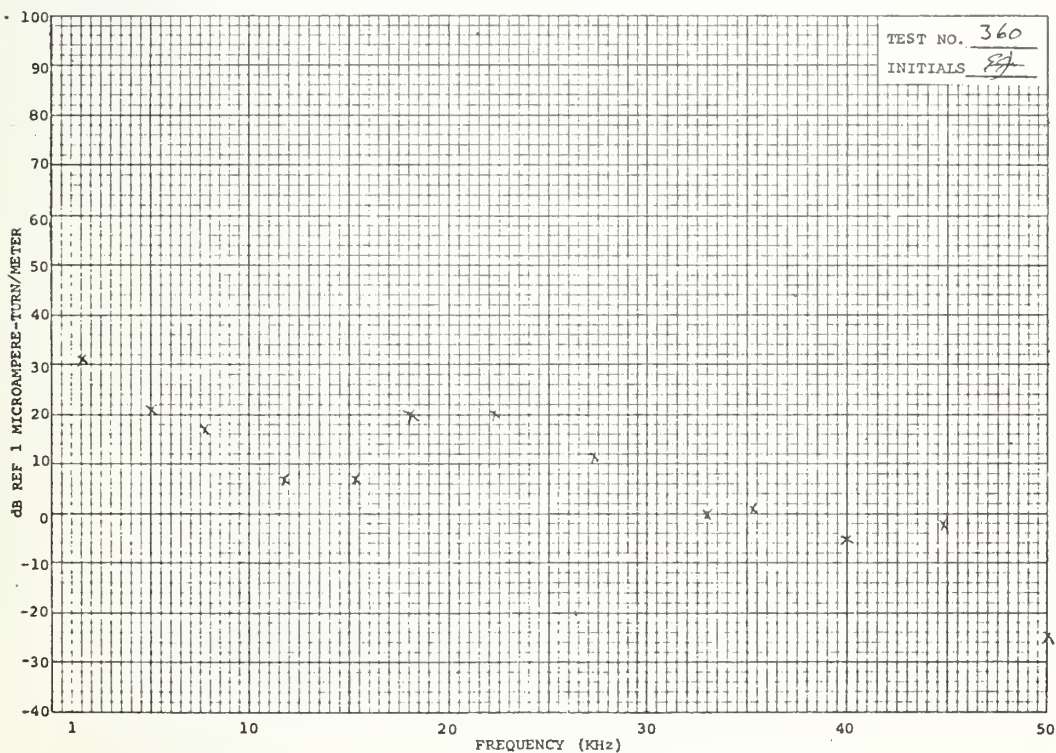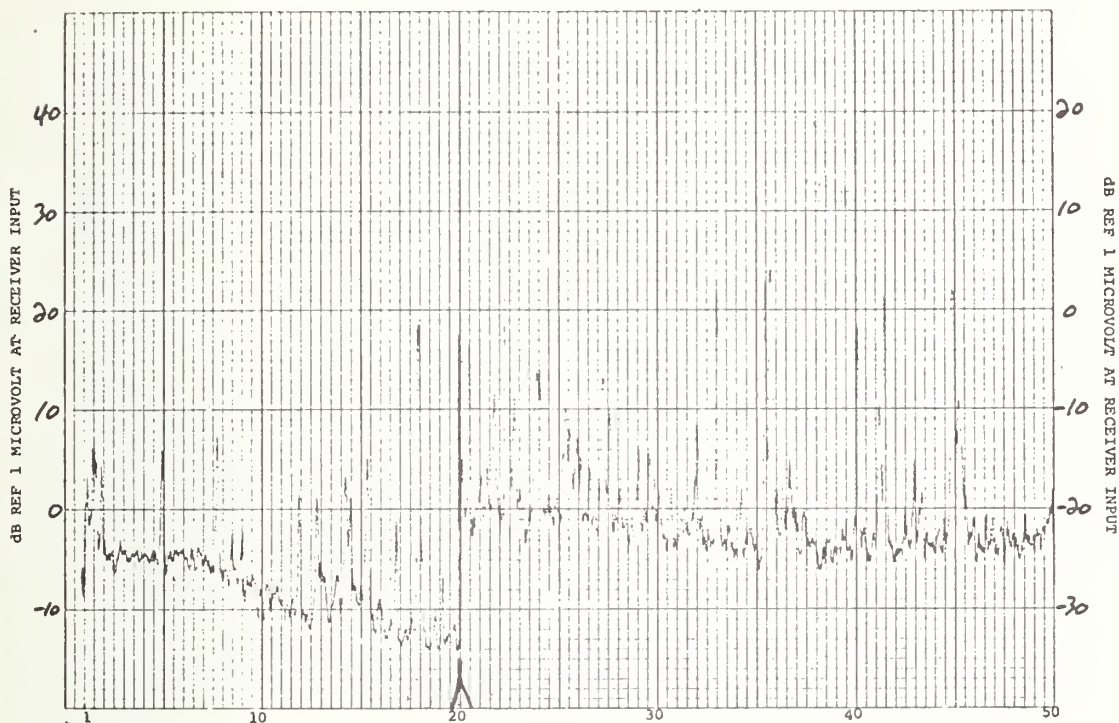



TEST NO. 360
INITIALS FFJ

TEST NO. 361
TEST SPECIMEN Sub 1

TEST TYPE MSP E/W
TEST EQUIP. EMC-10

BANDWIDTH 50 Hz
DATE 8-1-72

0912
EJ

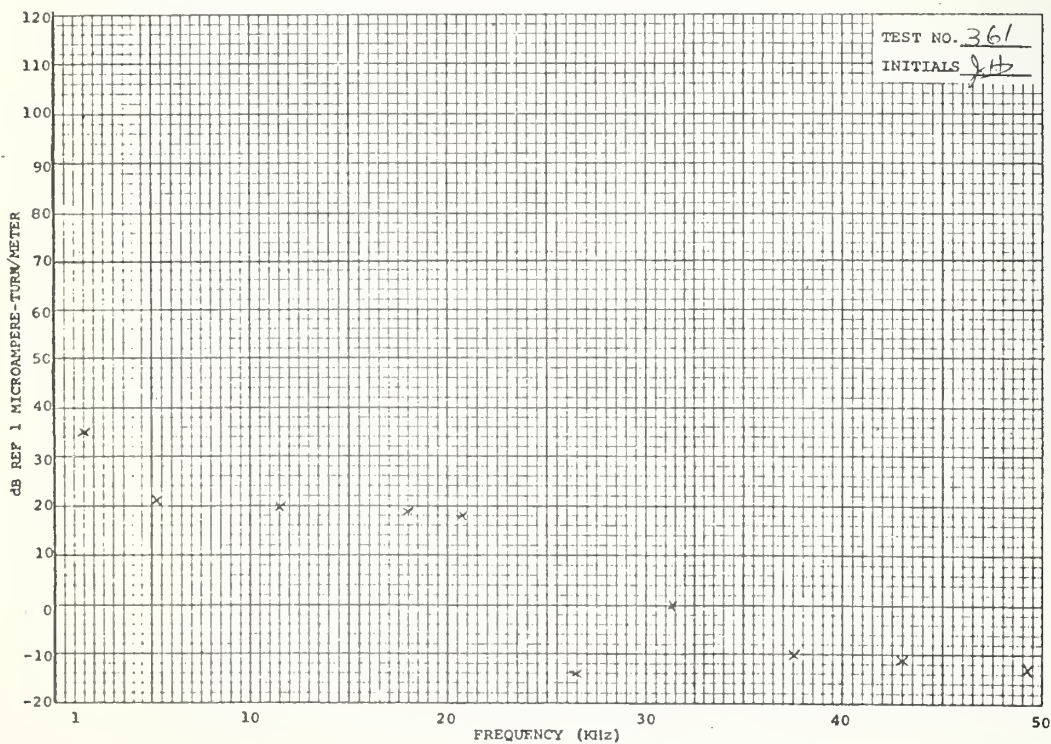
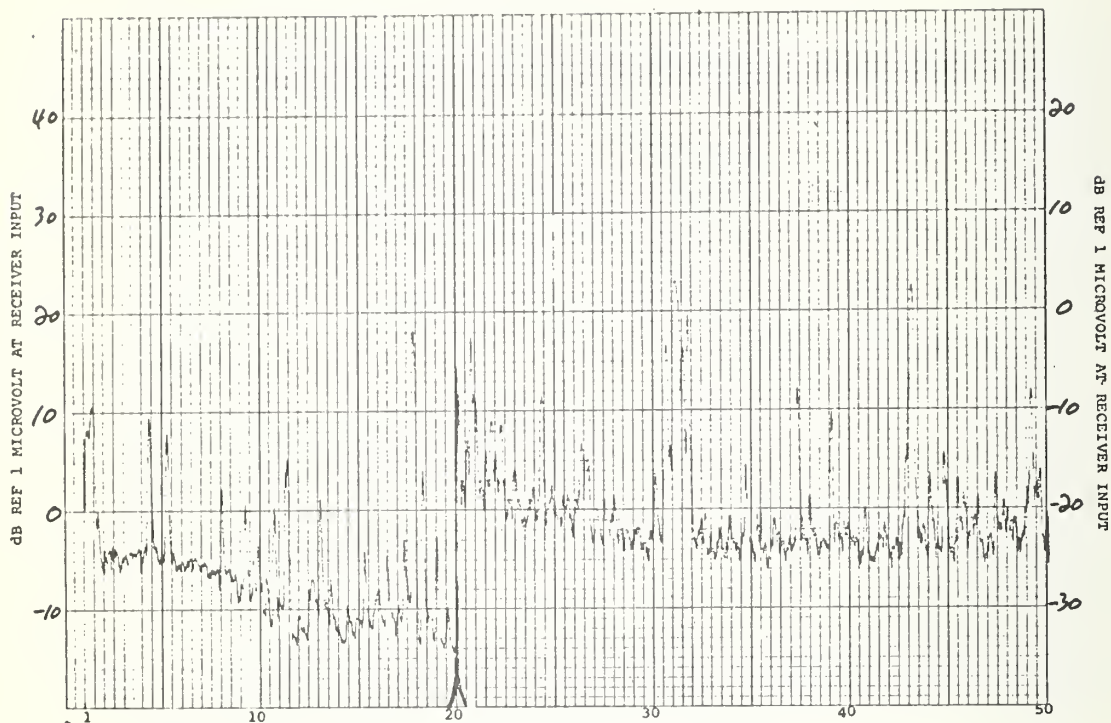


TEST NO. 362
TEST SPECIMEN 861

TEST TYPE MSR N/S
TEST EQUIP. EMC 10

BANDWIDTH 50Hz
DATE 8-1-72

0915
88

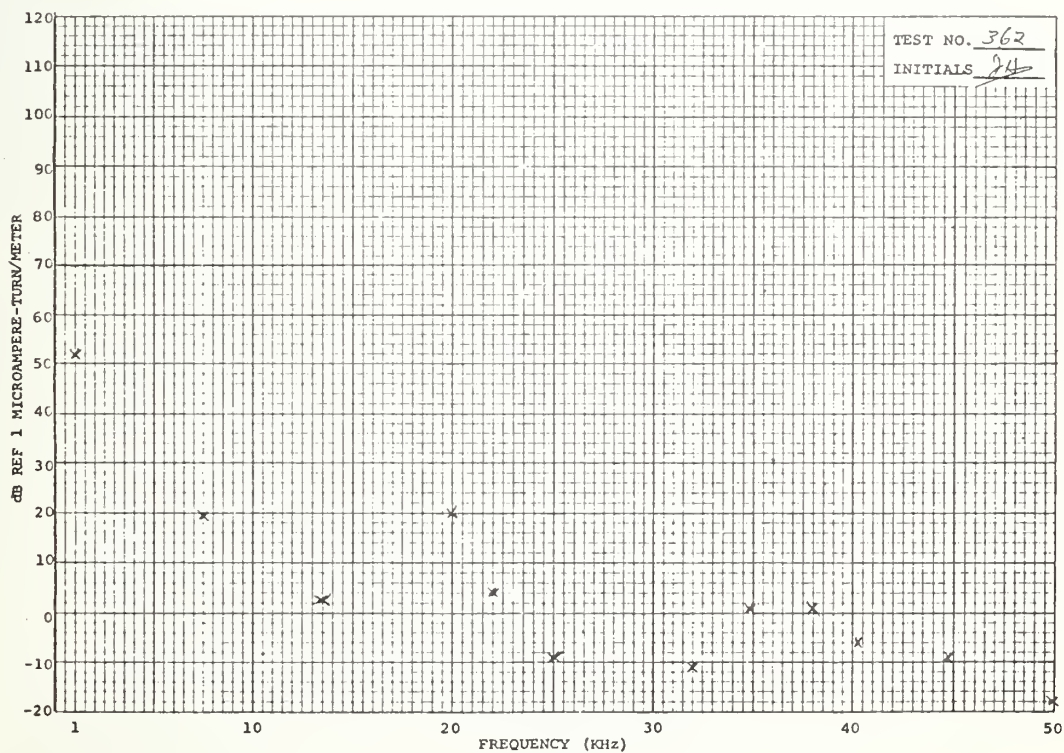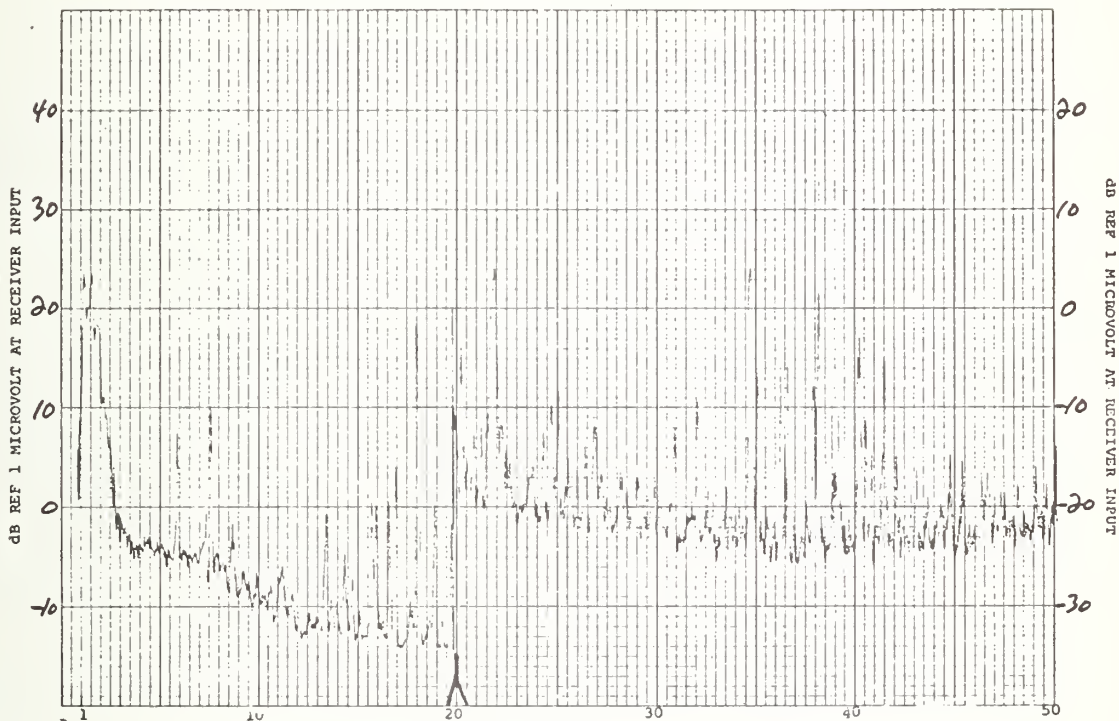



TEST NO. 362
INITIALS 84

TEST NO. 363
TEST SPECIMEN 8.61

TEST TYPE MSD N/S
TEST EQUIP. 1141 LC

BANDWIDTH 50 Hz
DATE 8-1-72

0919
VRC

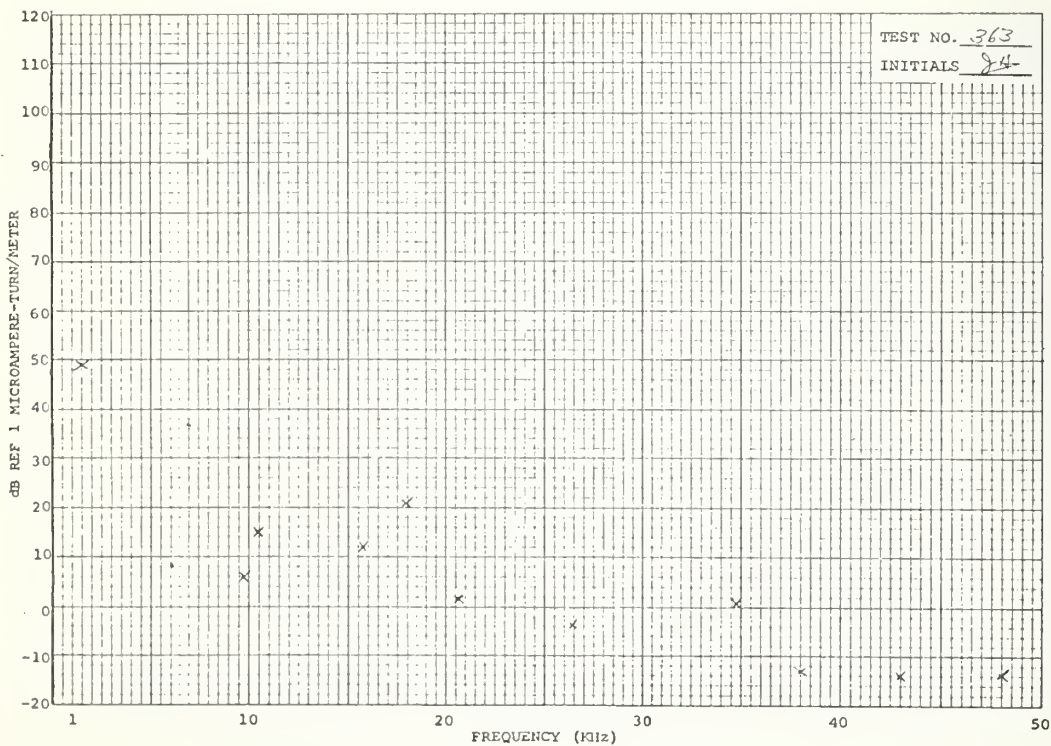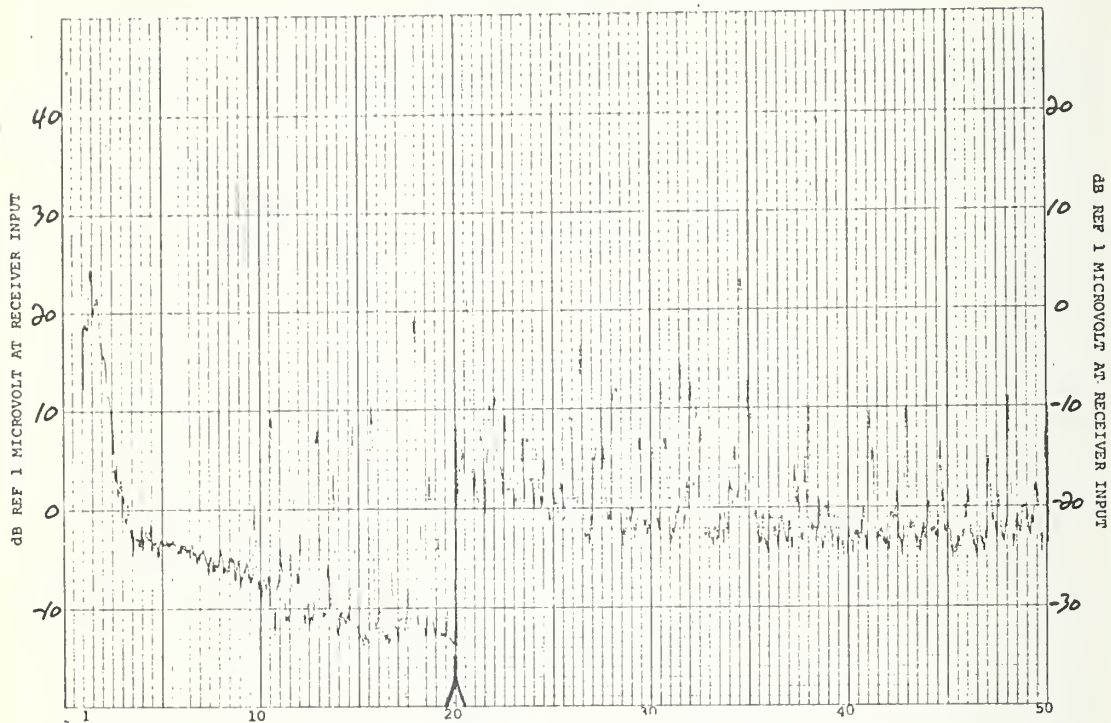


0849
EJ

BANDWIDTH 50 Hz
DATE 8-1-72

TEST TYPE ESR E/W
TEST EQUIP. EMC-10

TEST NO. 356
TEST SPECIMEN Lib 1

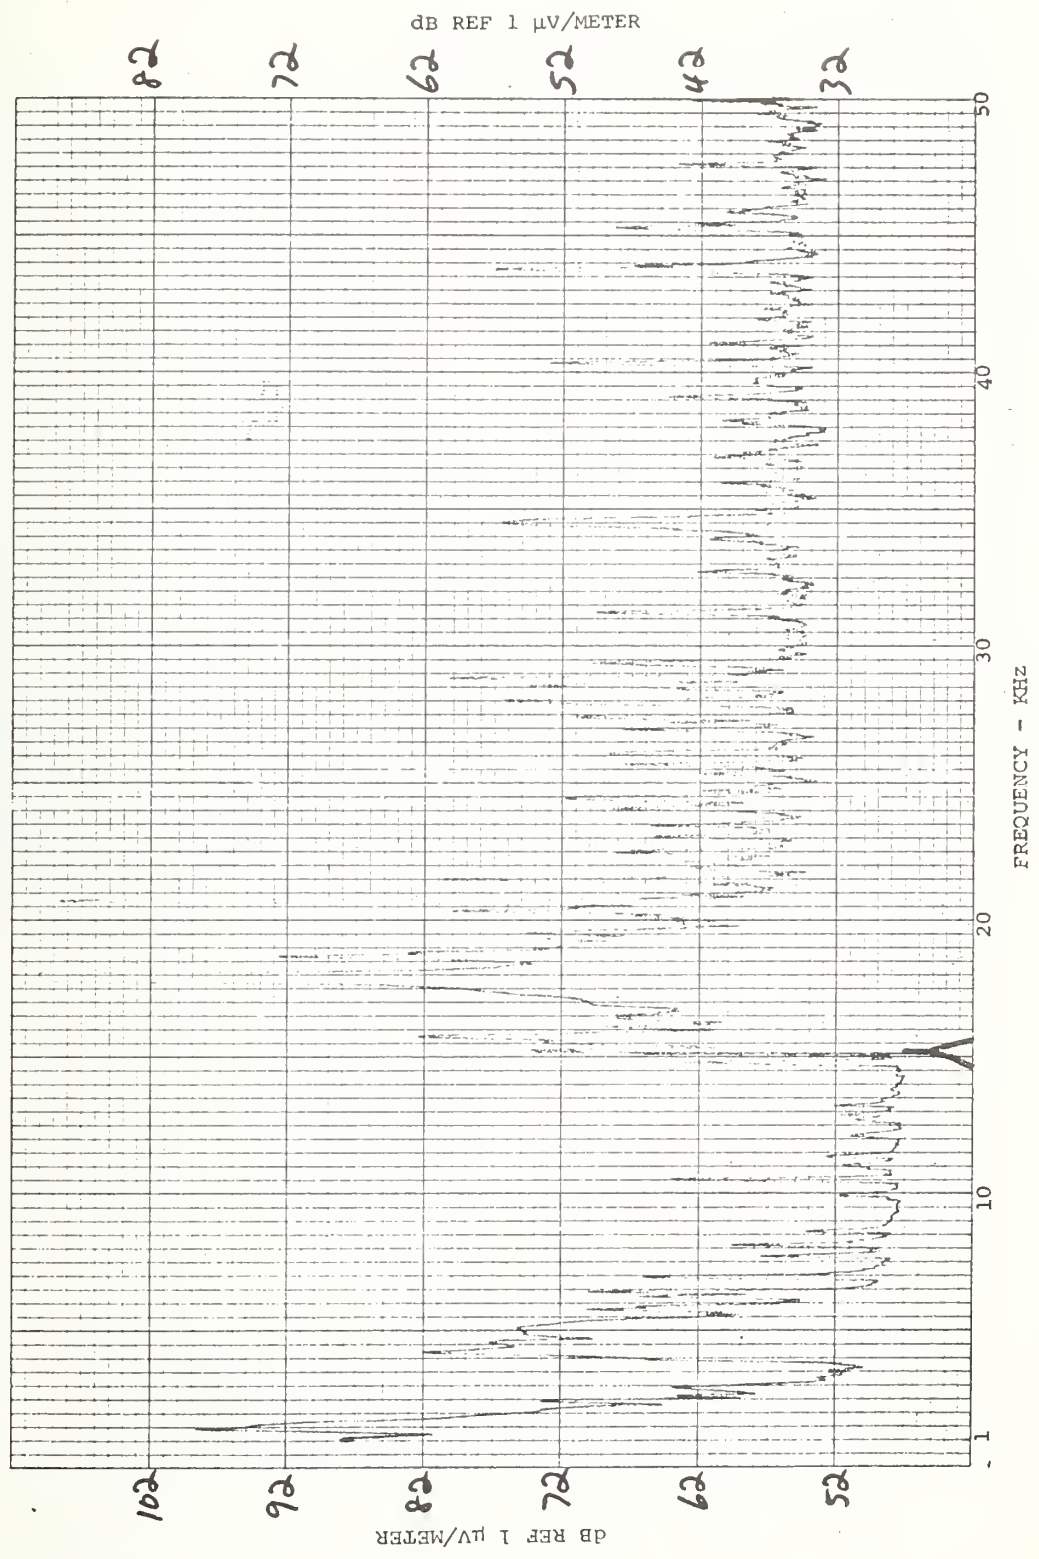


0852
852

BANDWIDTH 50 Hz
DATE 8-1-72

TEST TYPE ESR E/W
TEST EQUIP. EMC-10

TEST NO. 357
TEST SPECIMEN Sub 1

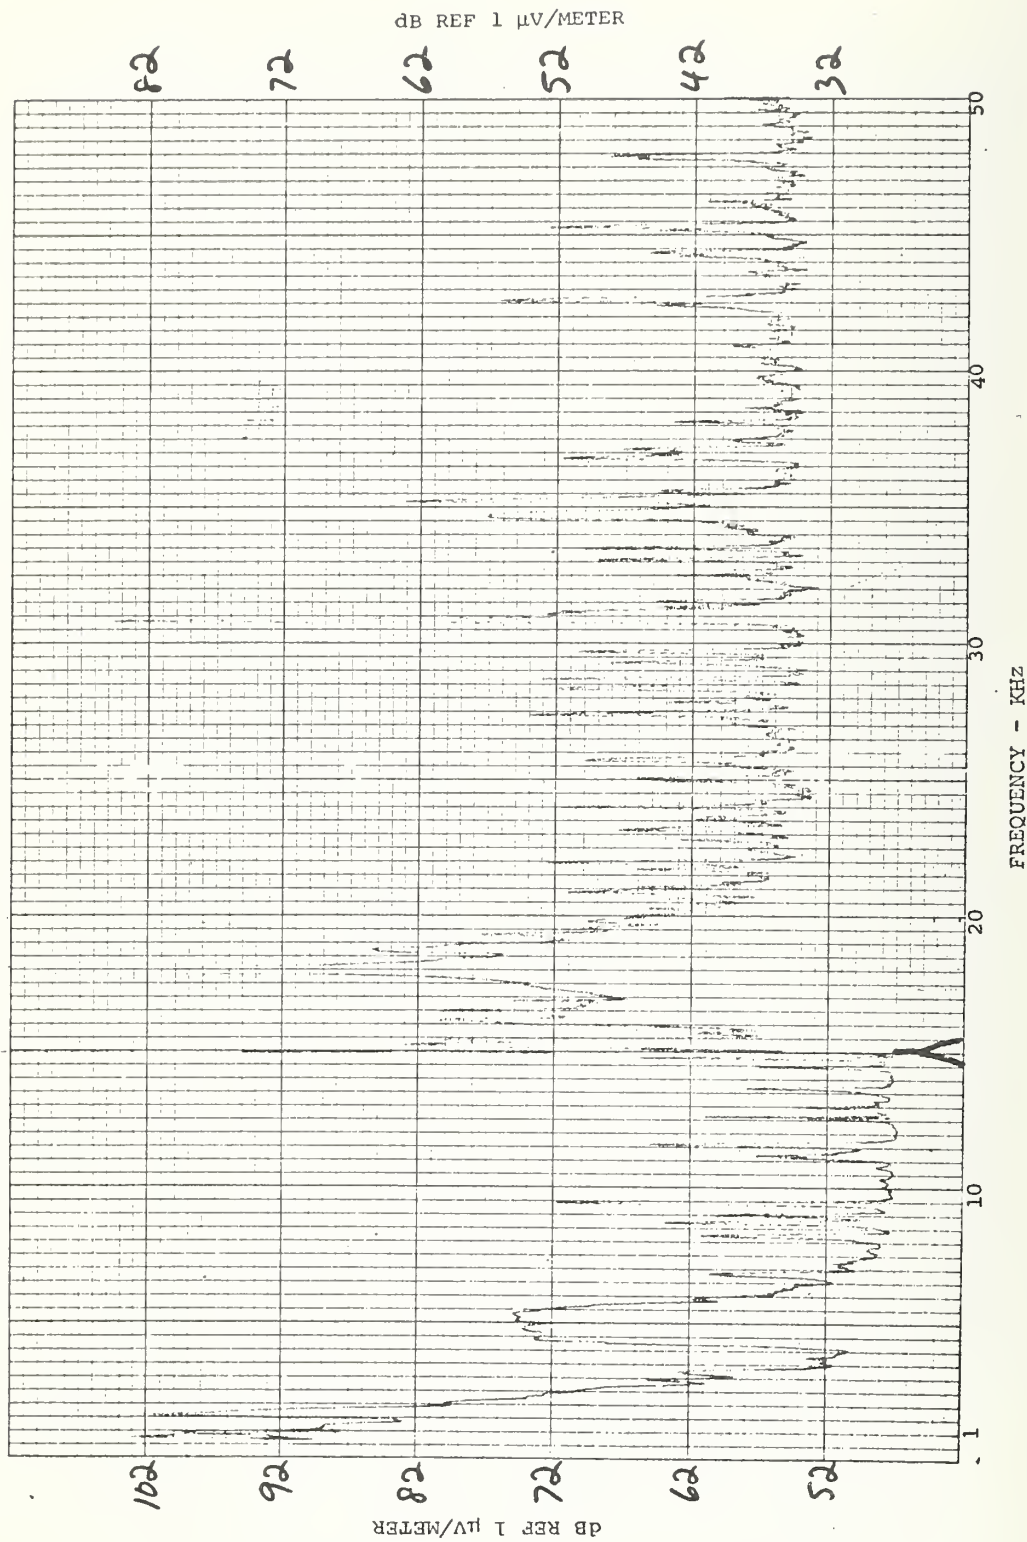

TEST NO. 358

TEST SPECIMEN Sib 1

TEST TYPE ESR N/S


TEST EQUIP. EMC-10

BANDWIDTH 50 Hz

DATE 8-1-72

0856

851

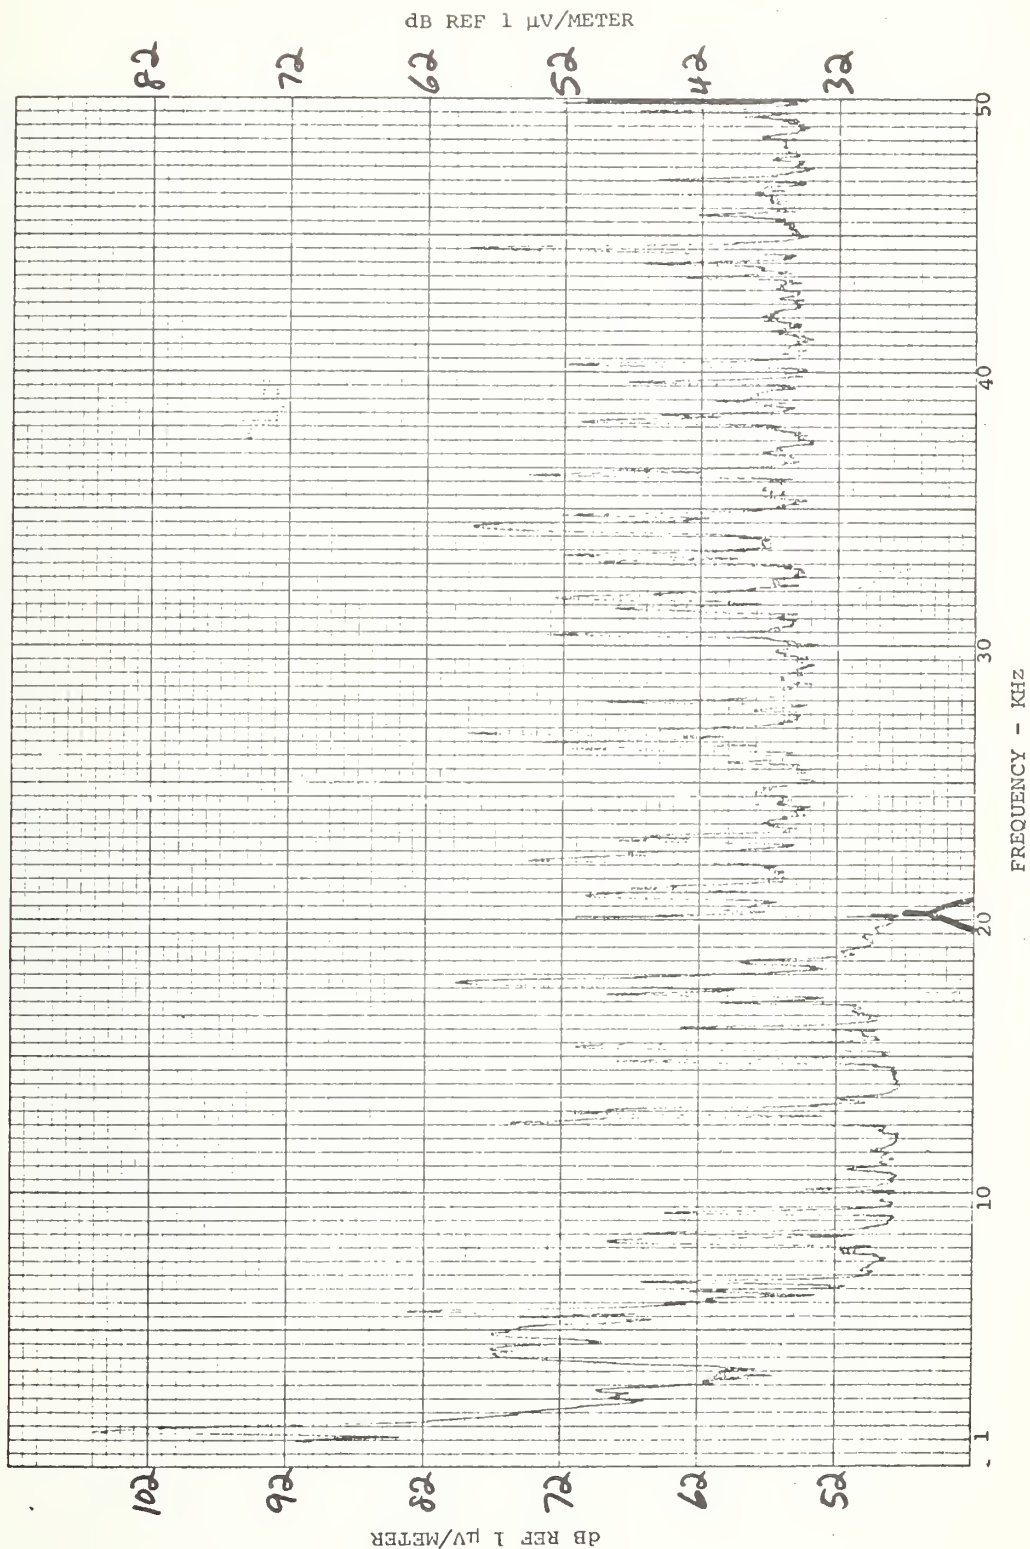


TEST NO. 359
TEST SPECIMEN X-1



TEST TYPE ESR N/S
TEST EQUIP. EMC-10

BANDWIDTH 50 Hz
DATE 8-1-78

0859
82

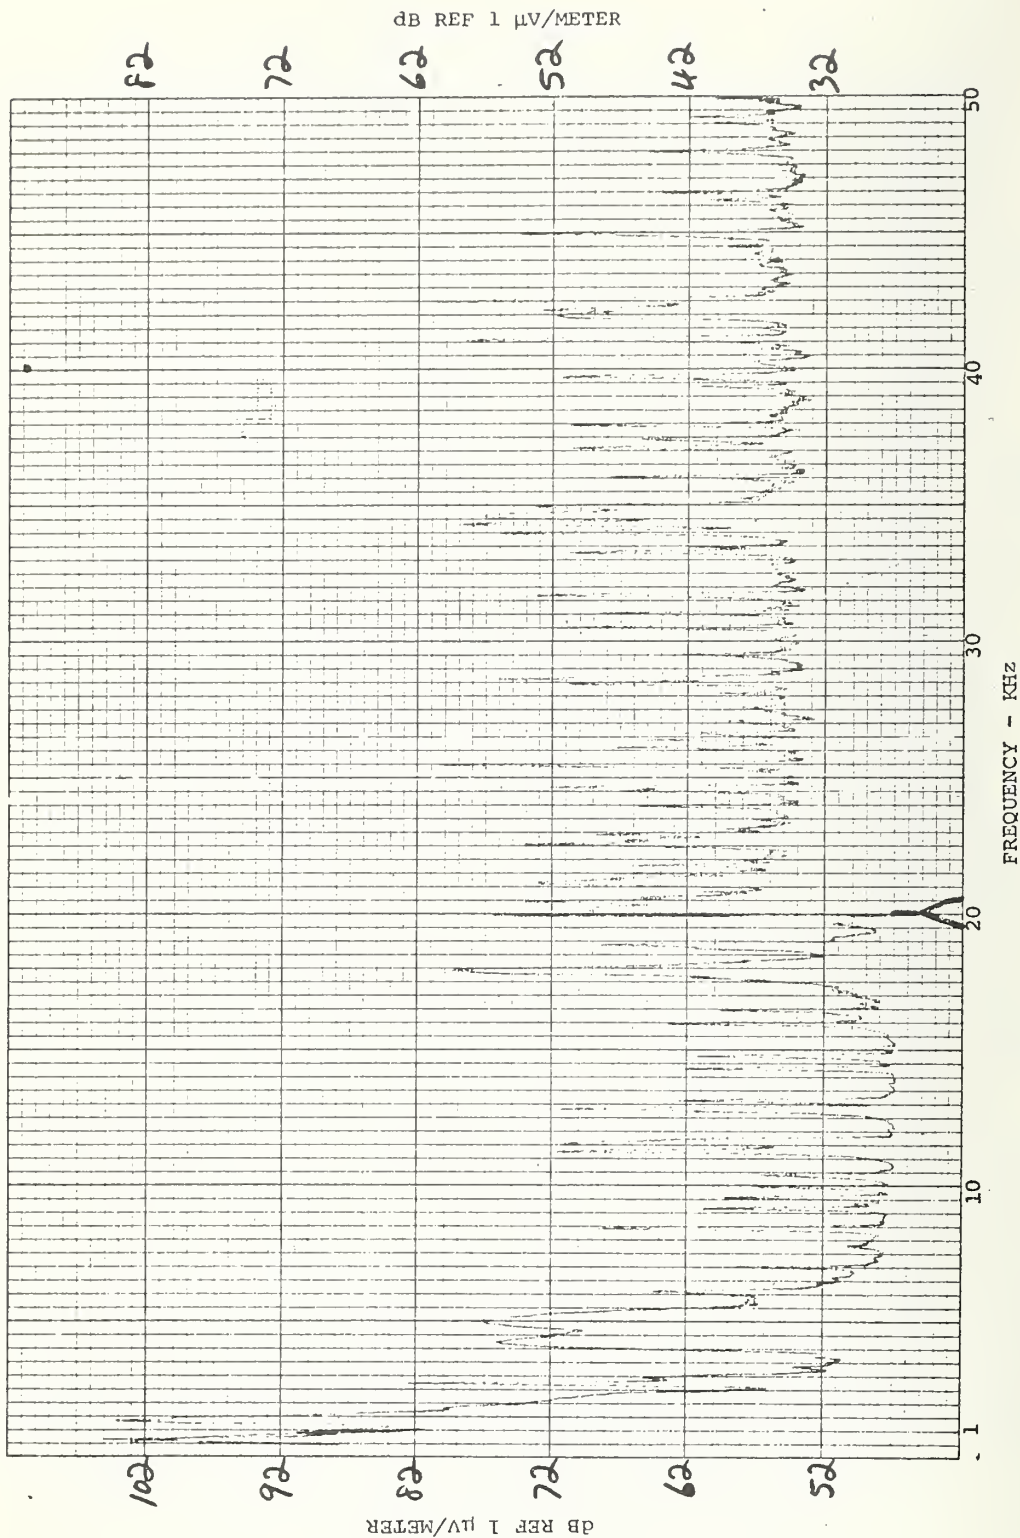

LOCATION: SITE 1 TYPE TEST ESR DATE 8-1-72

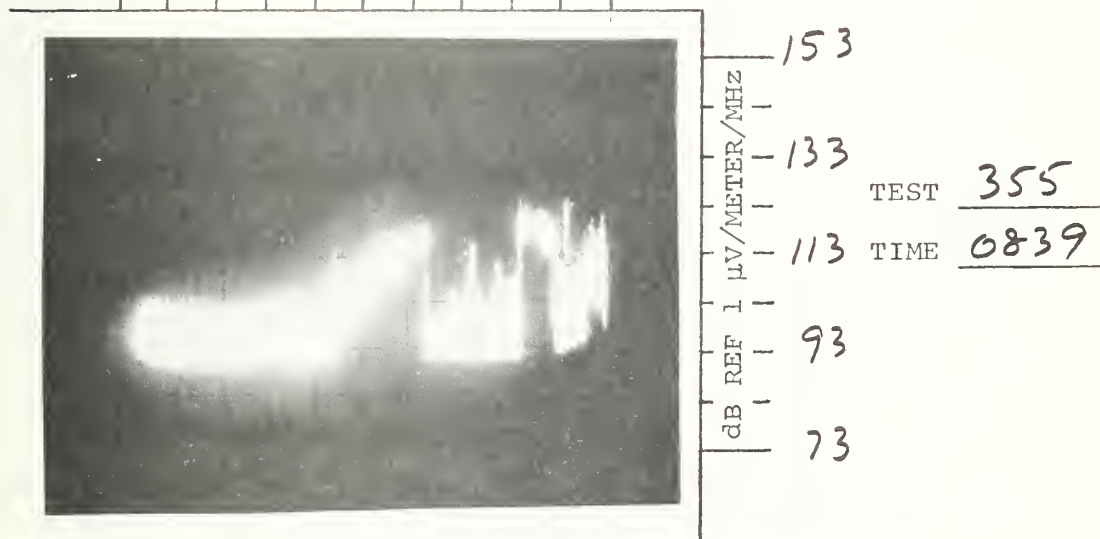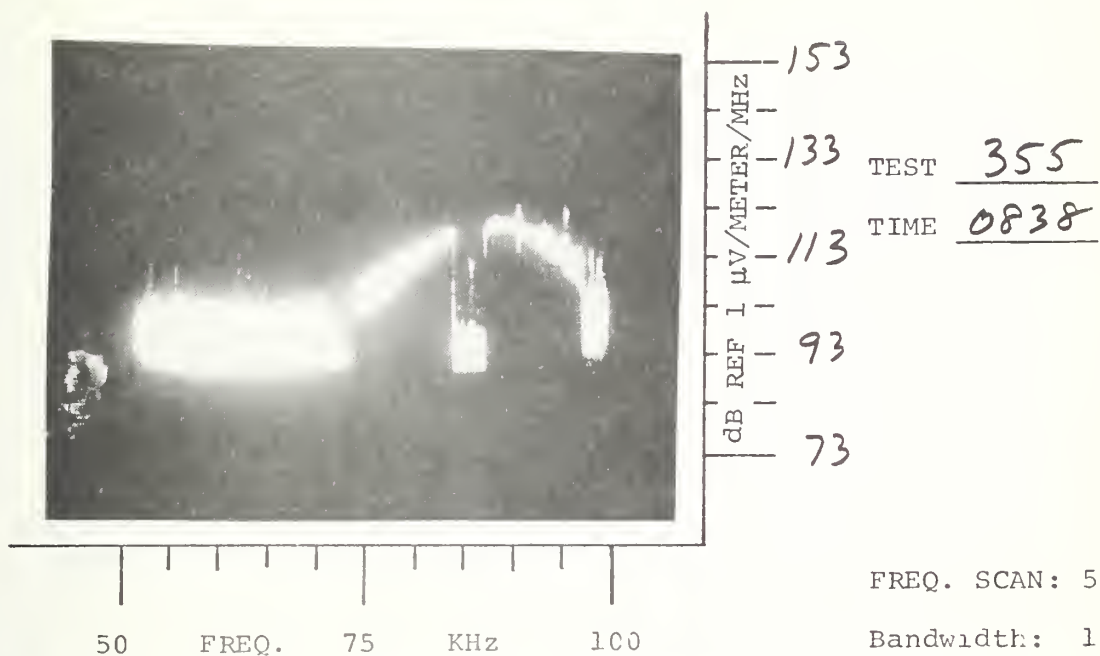

LOCATION: SITE 1 TYPE TEST ESR DATE 8-1-72




0.1 0.6 1.1
FREQ. MHz

153
133
113
93
73
dB REF 1 μ V/METER/MHz

TEST 354
TIME 0836


FREQ. SCAN: 0.1 MHz/Div.
Bandwidth: 10 kHz

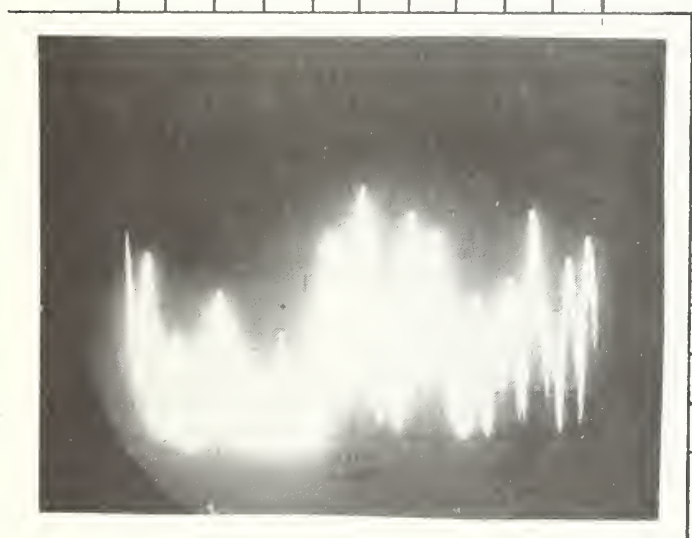

153
133
113
93
73
dB REF 1 μ V/METER/MHz

TEST 354
TIME 0836.5

LOCATION: SITE 1 TYPE TEST ESR DATE 8-1-72

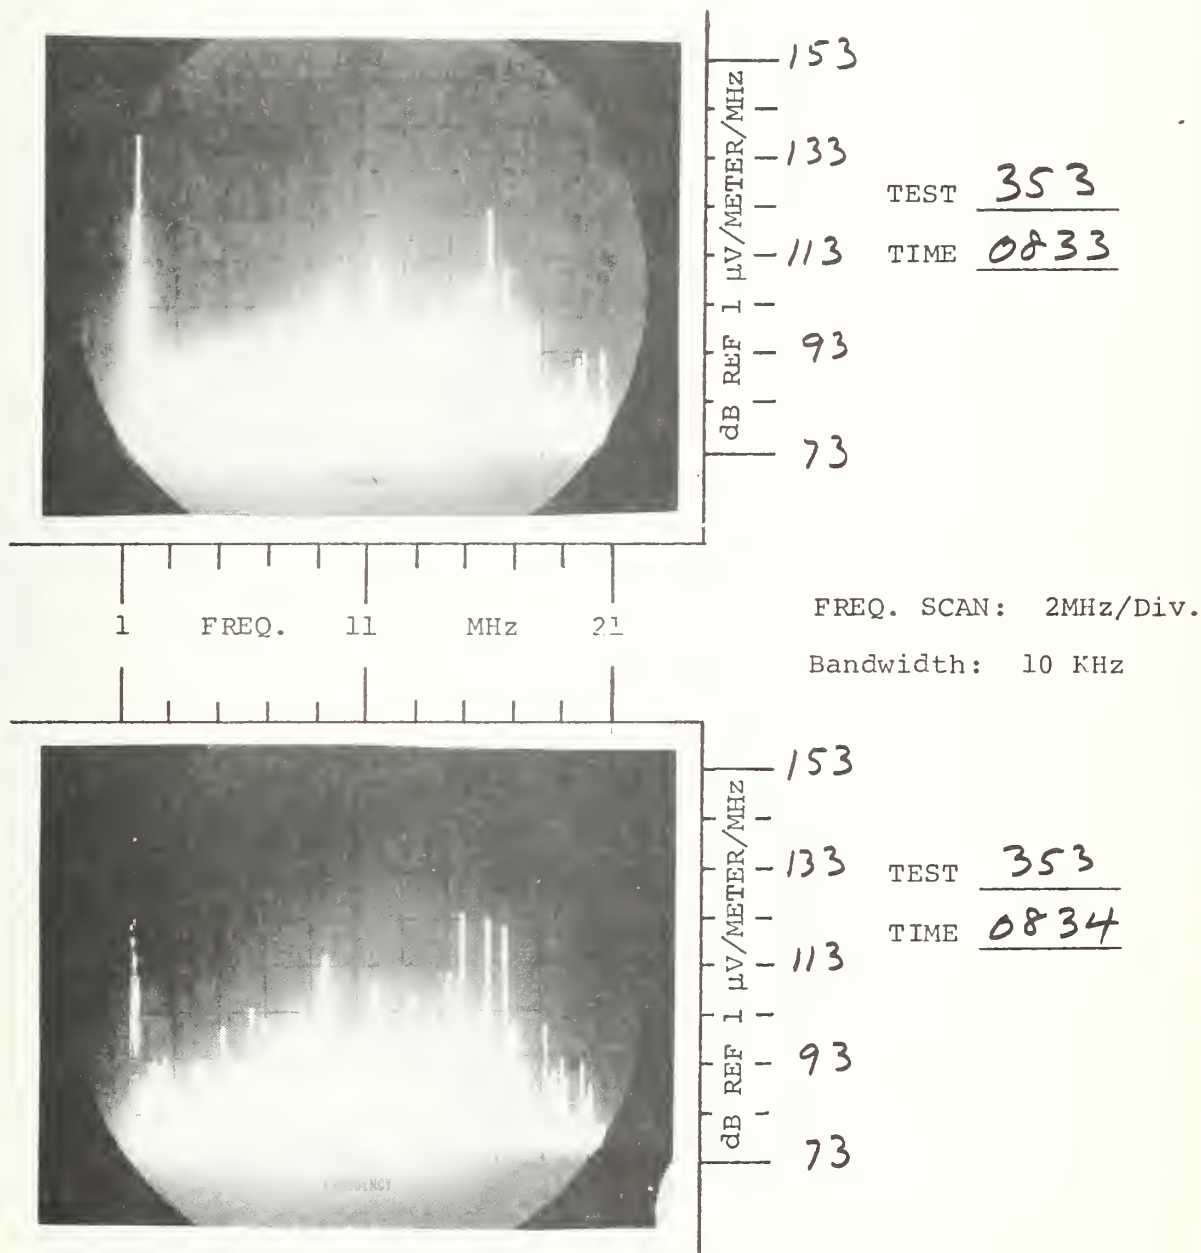

LOCATION: SITE 1 TYPE TEST ESR E/W DATE 8-1-72




125
105
85
65
45
dB REF 1 μ V/METER/MHz

TEST 351
TIME 0825

10 FREQ. 35 MHz 60

FREQ. SCAN: 5MHz/Div.

bandwidth: 10 KHz

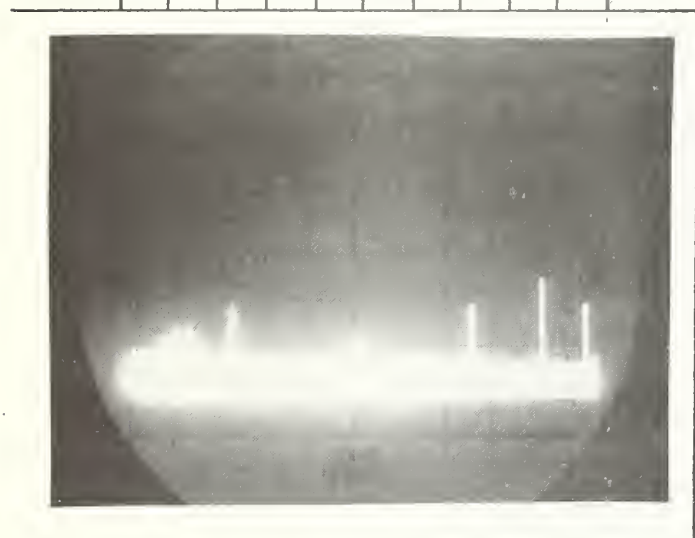

125
105
85
65
45
dB REF 1 μ V/METER/MHz

TEST 351
TIME 0826

LOCATION: SITE 1 TYPE TEST ESR N/S DATE 8-1-72



10 FREQ. 35 MHz 60

125
105
85
65
45
dB REF 1 μ V/METER/MHz

TEST 352
TIME 0827

FREQ. SCAN: 5MHz/Div.

Bandwidth: 10 KHz



125
105
85
65
45
dB REF 1 μ V/METER/MHz



TEST 352
TIME 0829

TEST NO. 390
TEST SPECIMEN Sc 4

TEST TYPE MSP F/U
TEST EQUIP. 1 MC 10

BANDWIDTH 50 Hz
DATE 8-1-72

1139
SE

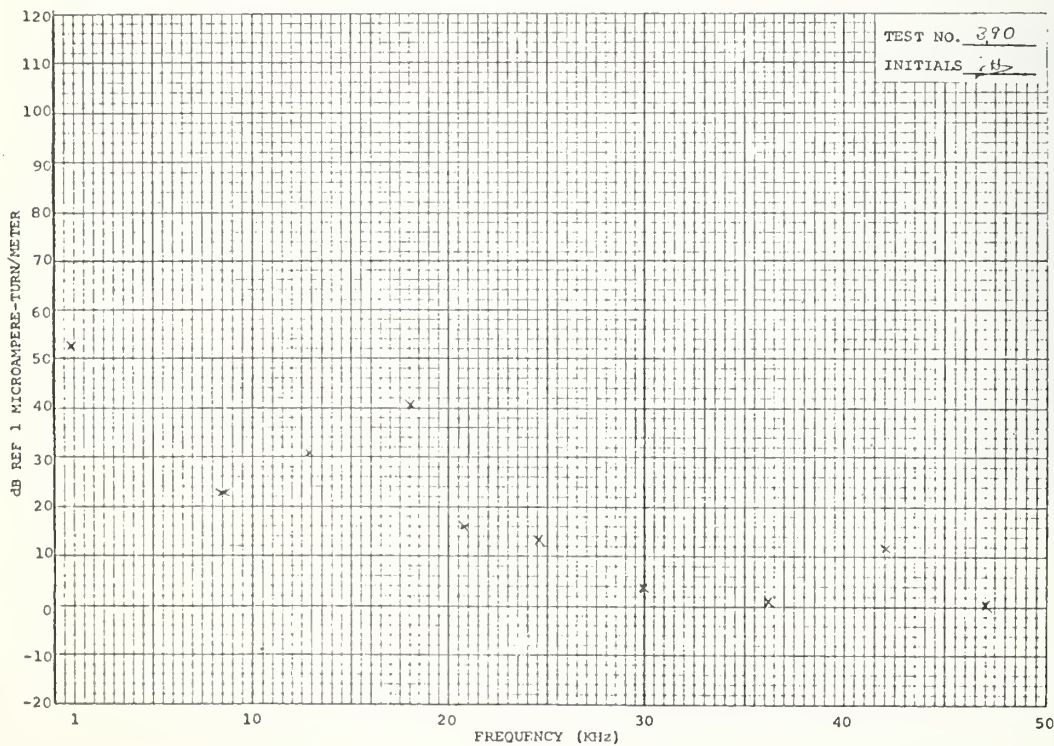
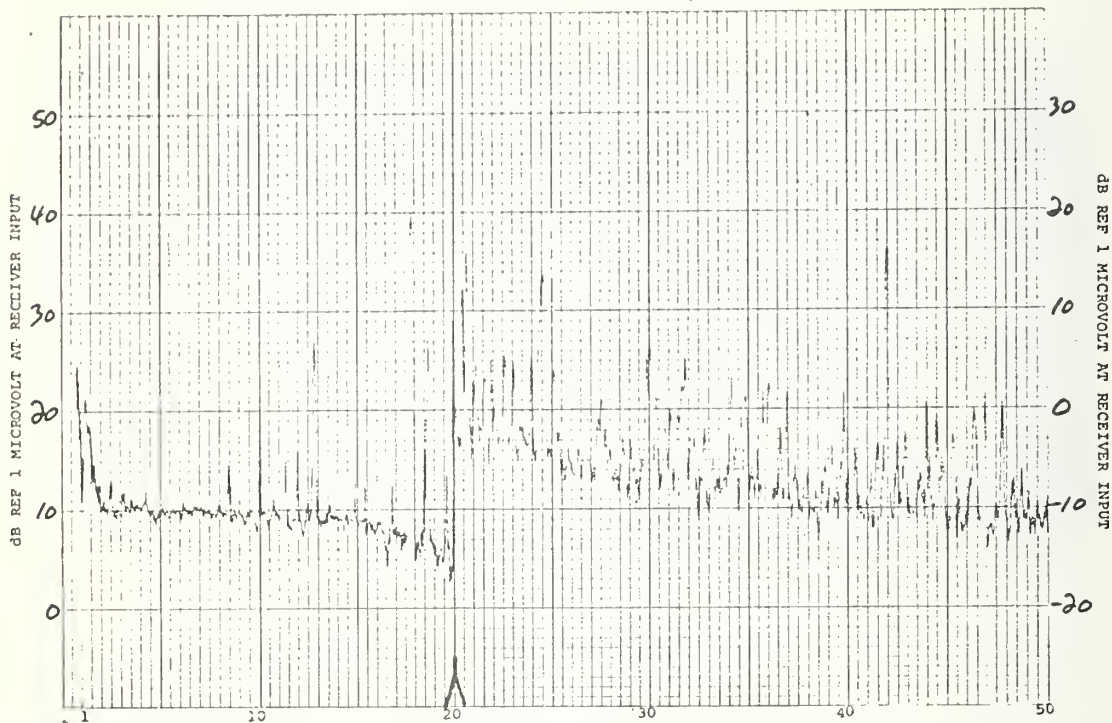


TEST NO. 391
TEST SPECIMEN 8.6 4

TEST TYPE MSR F/W
TEST EQUIP. 1M-10

BANDWIDTH 50 Hz
DATE 8-1-72

1142
EE

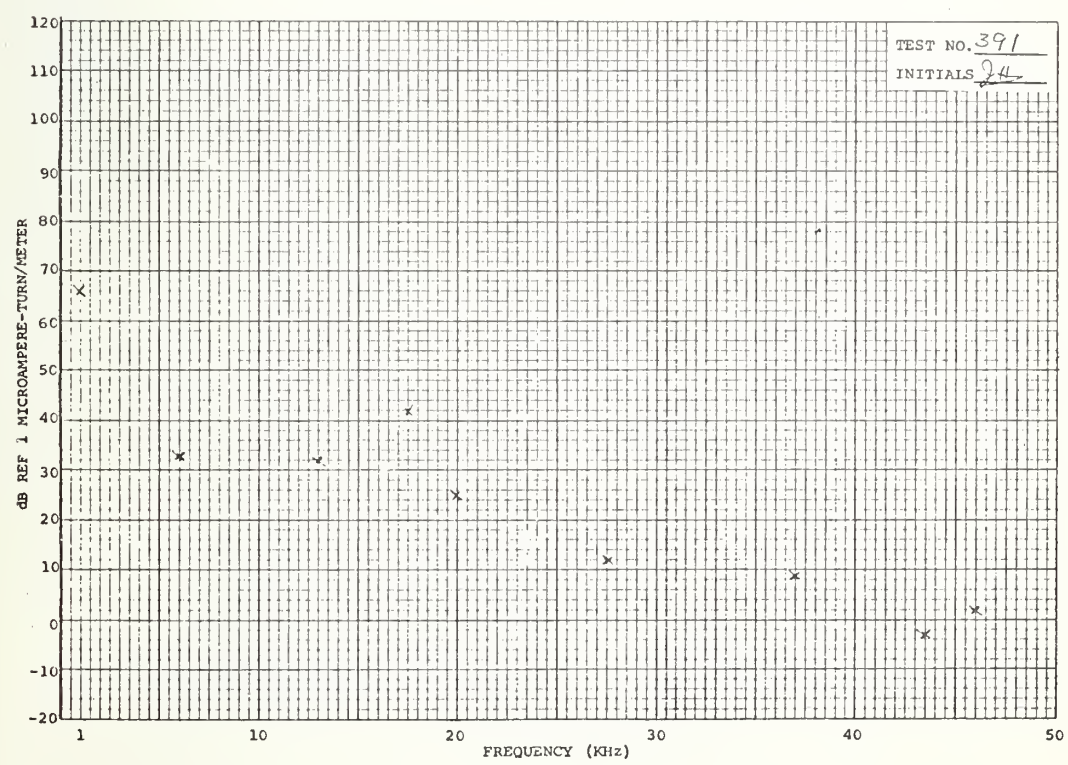
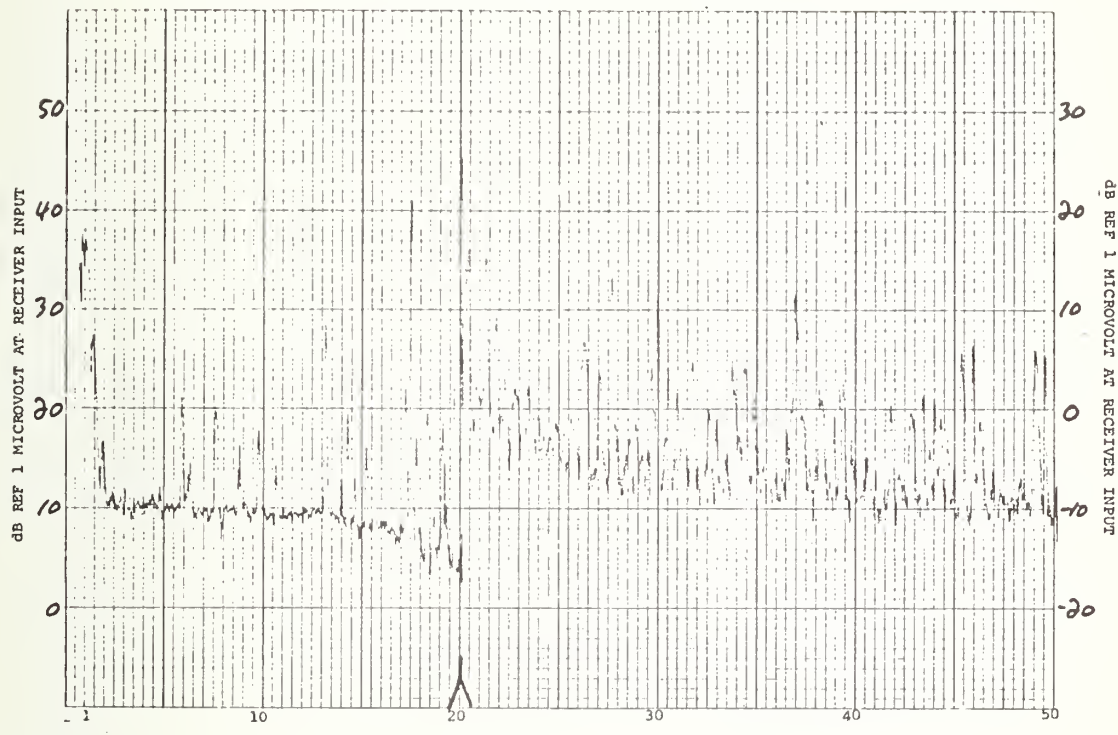


TEST NO. 388
TEST SPECIMEN Site 4

TEST TYPE MSR N/S
TEST EQUIP. 1MC-10

BANDWIDTH 50 Hz
DATE 8-1-72

1133
EFJ

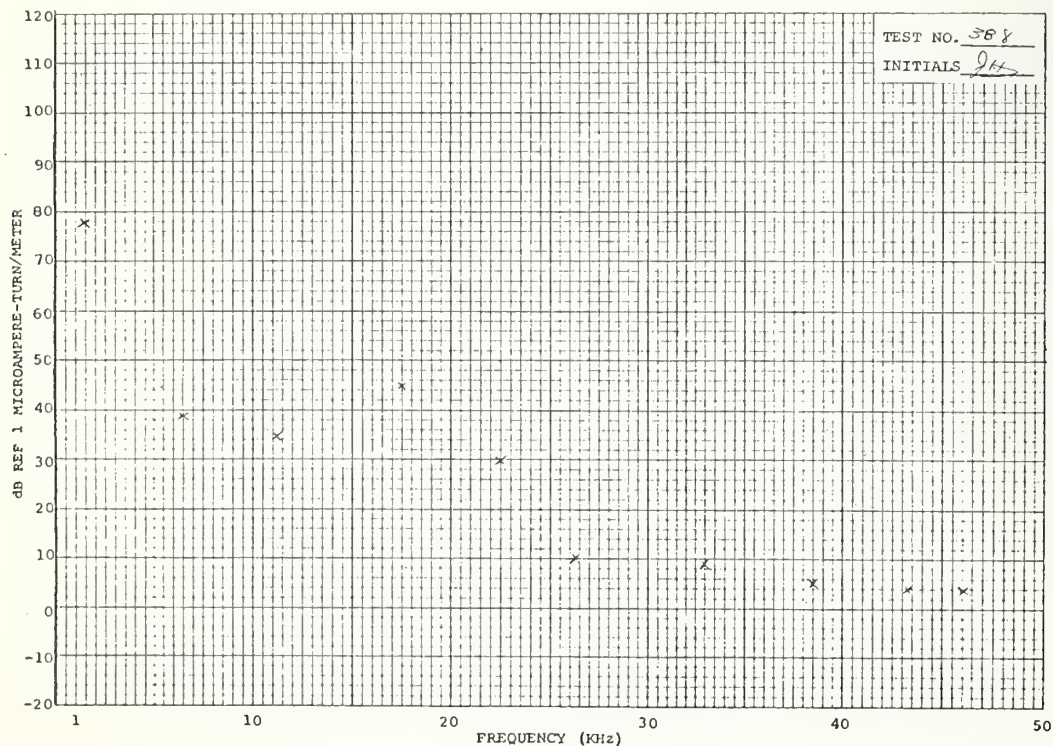
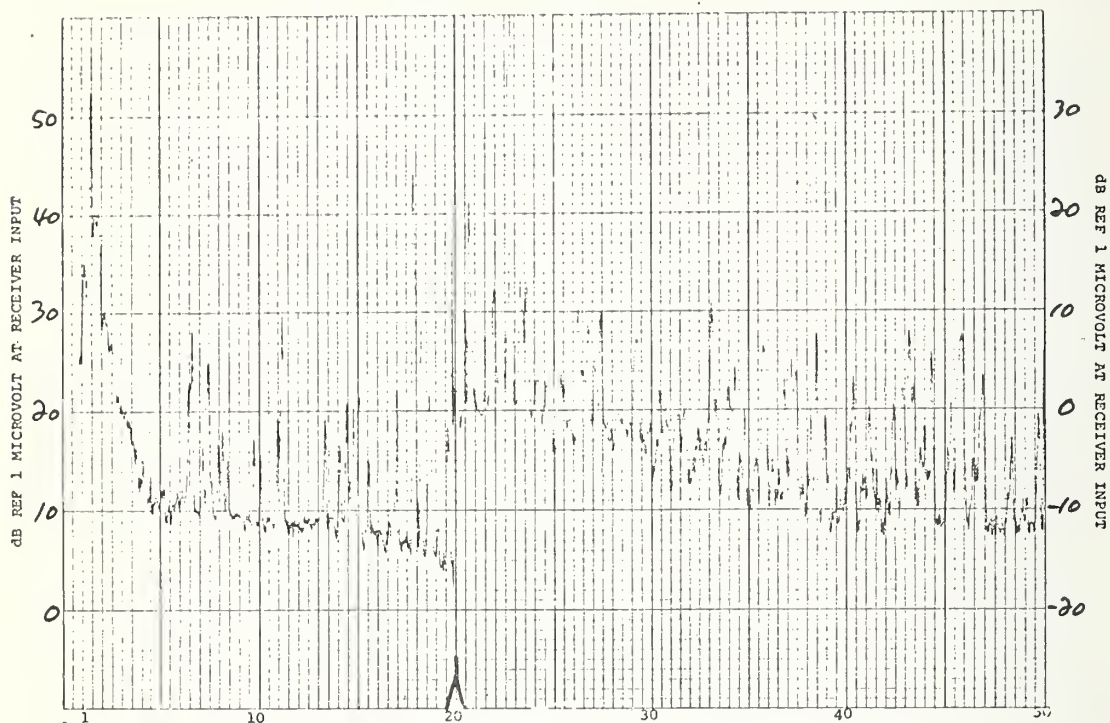


TEST NO. 389
TEST SPECIMEN 8-10-4

TEST TYPE MSR N/S
TEST EQUIP. ENC-10

BANDWIDTH 50 HZ
DATE 8-1-72

1136
SSJ

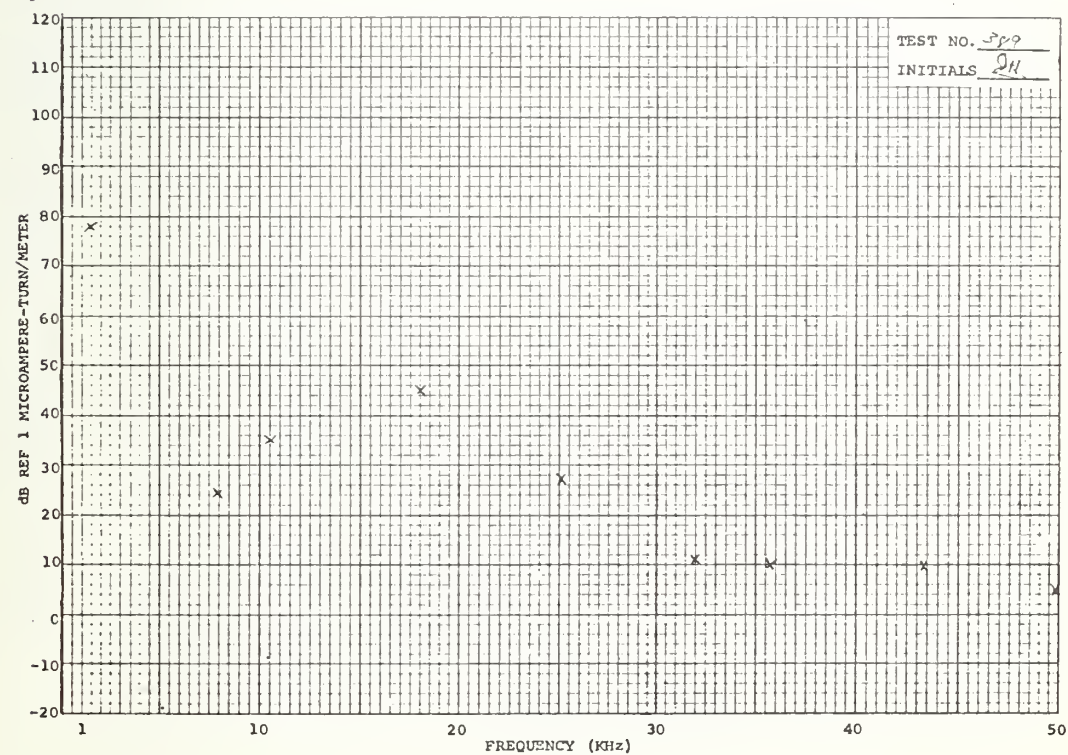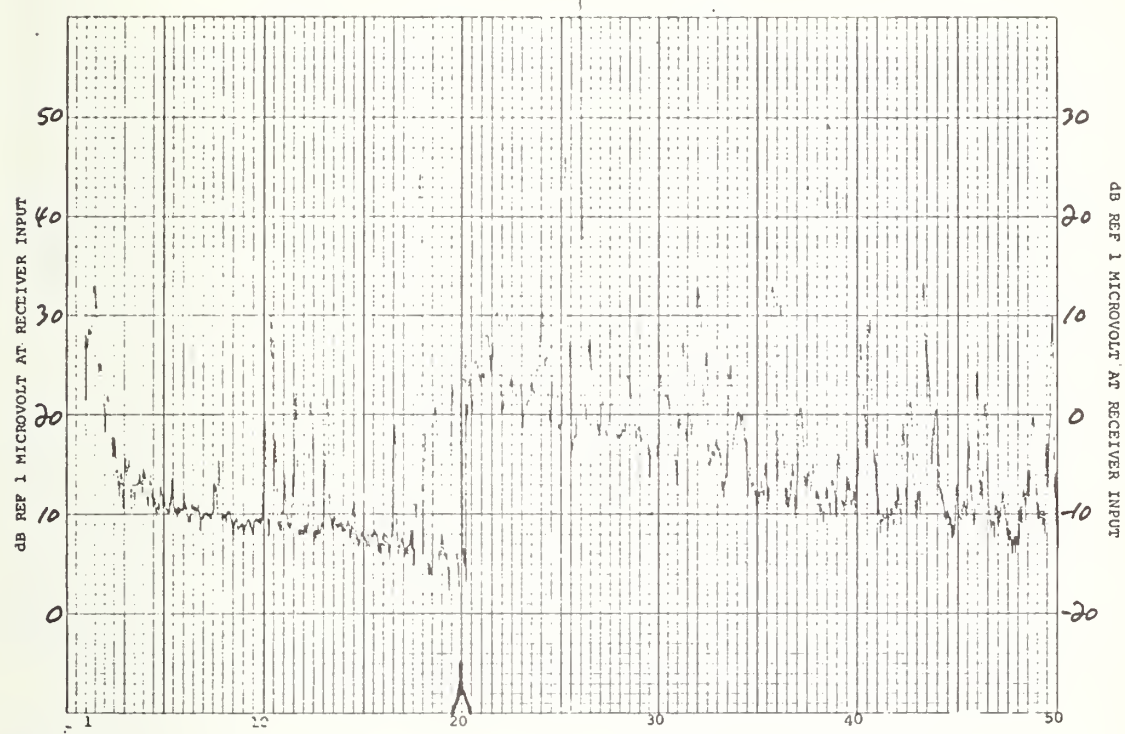


TEST NO. 389
INITIALS SH

1117
VRC

BANDWIDTH 50Hz
DATE 8-1-72

TEST TYPE ESR E/W
TEST EQUIP. EMC-10

TEST NO. 384
TEST SPECIMEN X-204

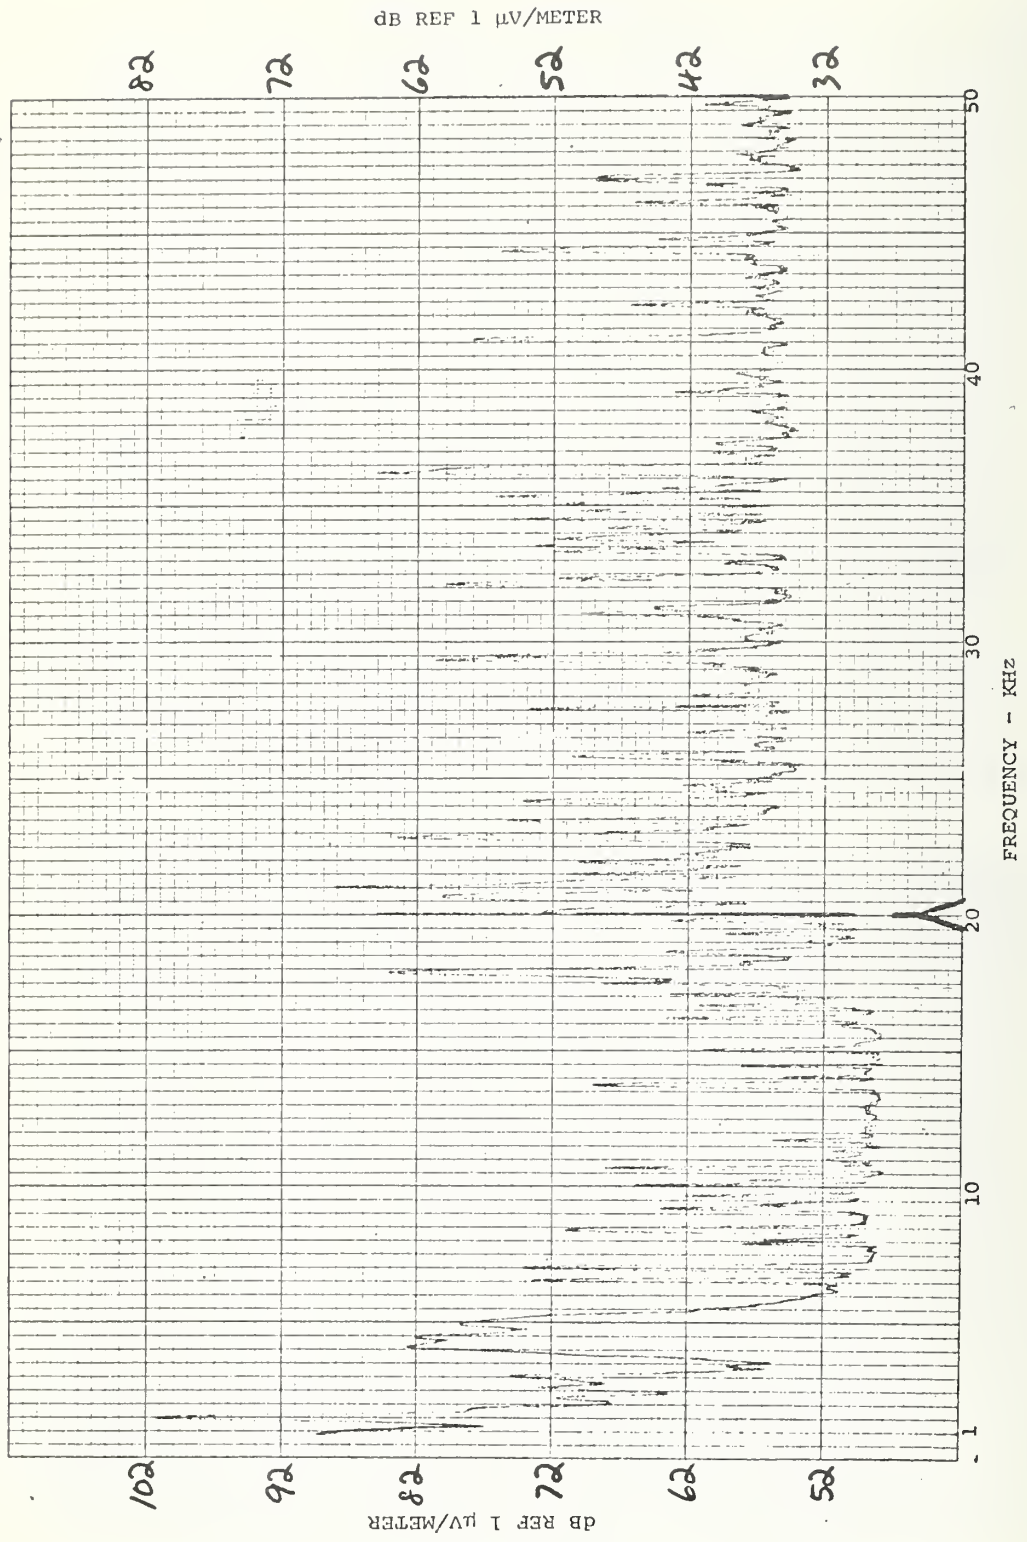


TEST NO. 385
TEST SPECIMEN 4


TEST TYPE ESR E/W
TEST EQUIP. EMC-10

BANDWIDTH 50 Hz
DATE 8-1-72

1120
URC

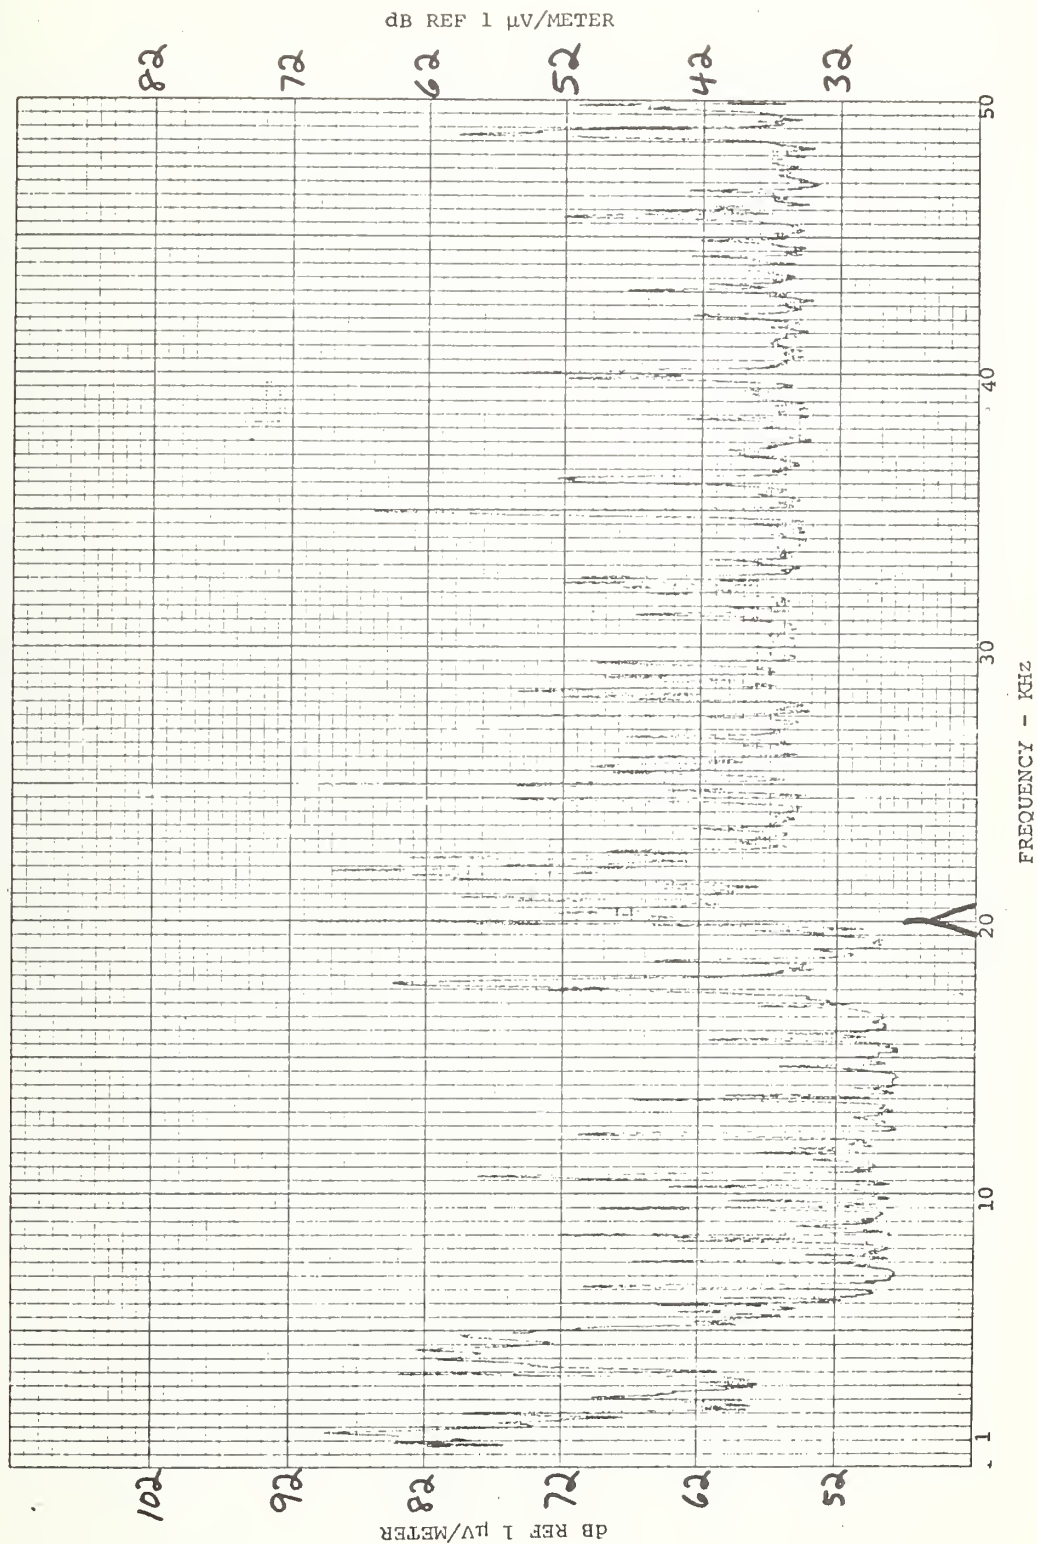

TEST NO. 386 TEST TYPE ESR N/S BANDWIDTH 50 Hz 1124
 TEST SPECIMEN 4 TEST EQUIP. EMC-10 DATE 8-1-72 289

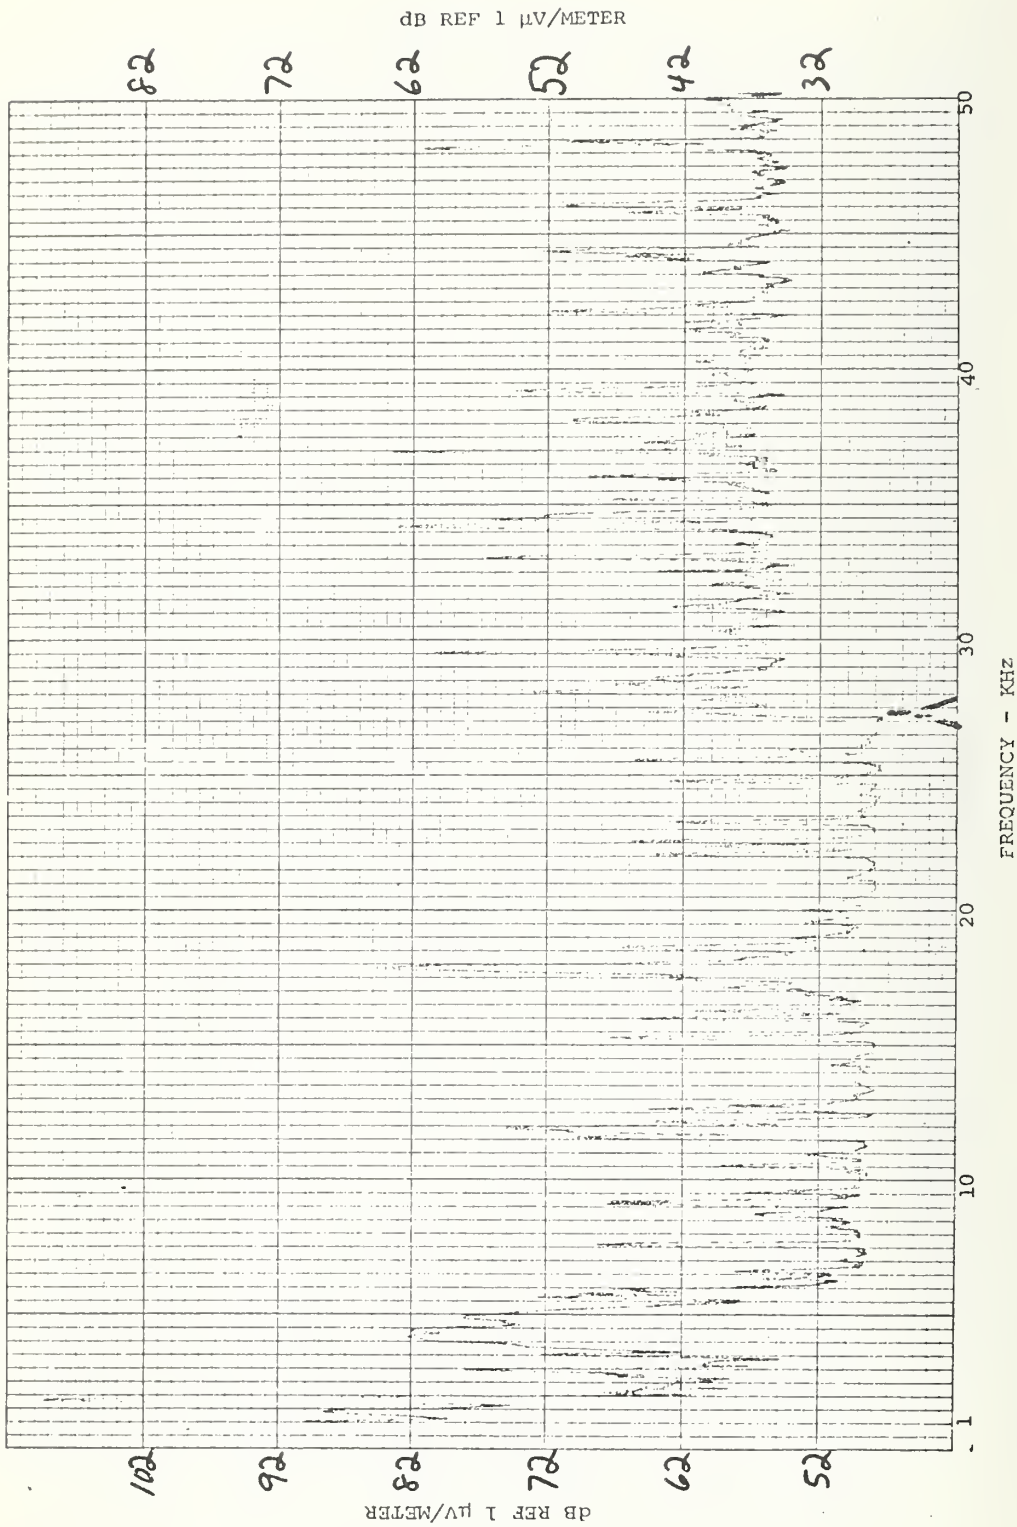


TEST NO. 387
TEST SPECIMEN Sub 4


TEST TYPE ESR N/S
TEST EQUIP. EMC-10

BANDWIDTH 50 Hz
DATE 8-1-72

1127
ESR

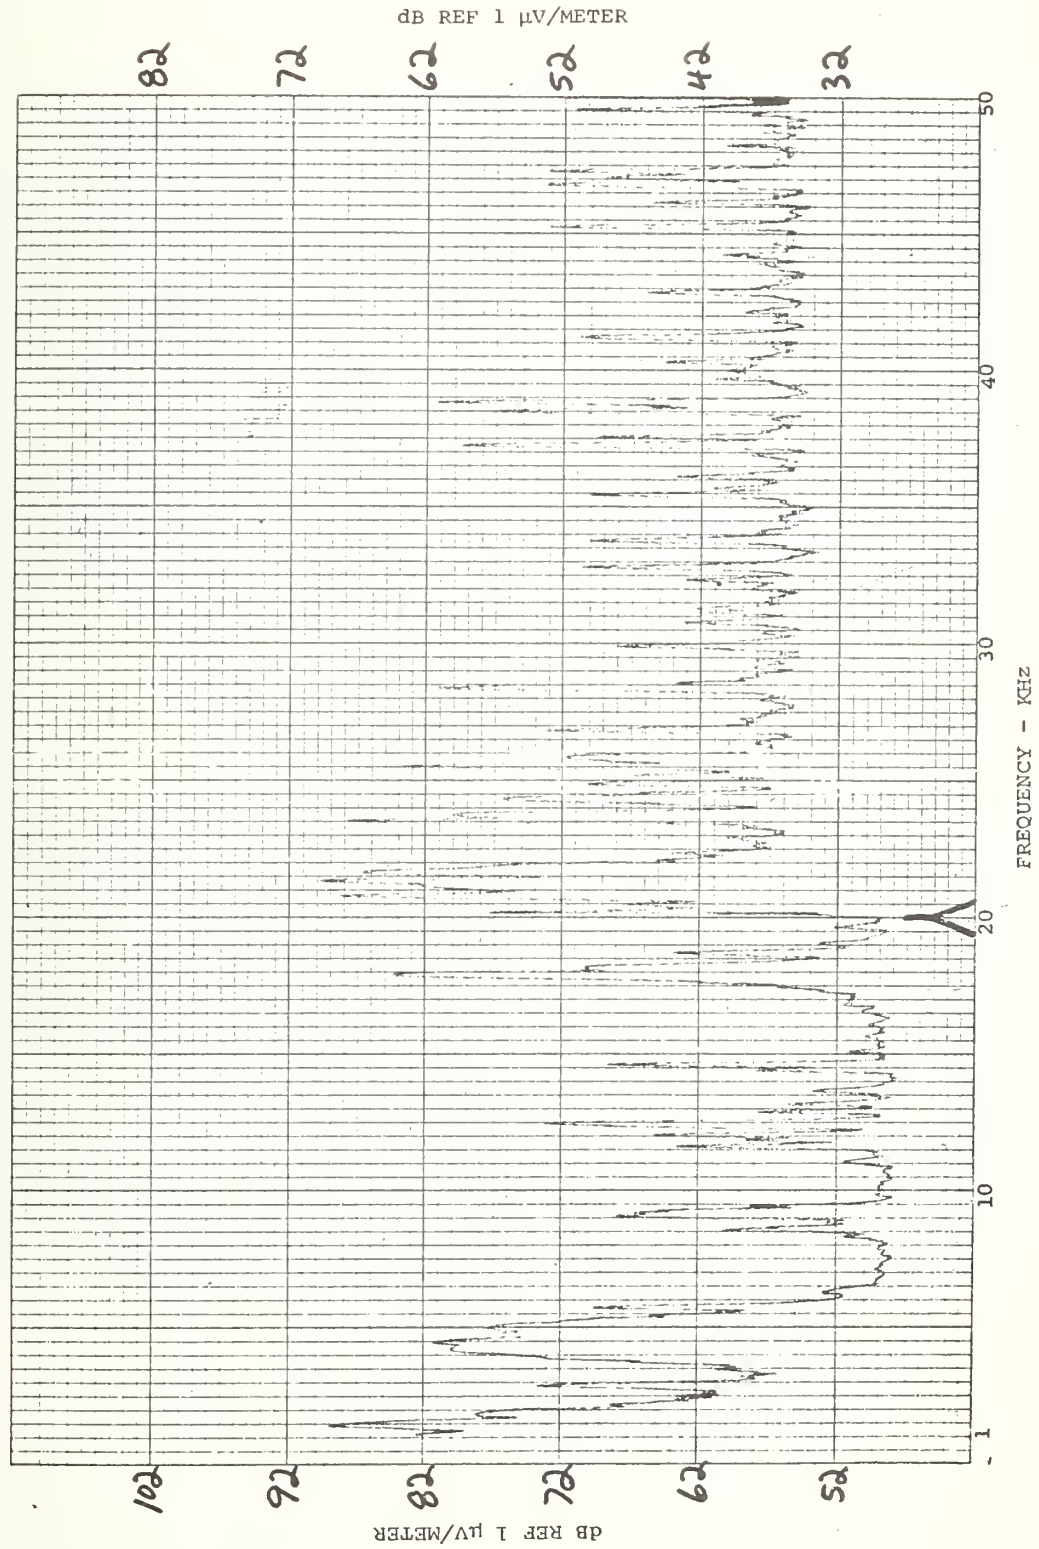

LOCATION: SITE 4 TYPE TEST ESR DATE 8-1-72

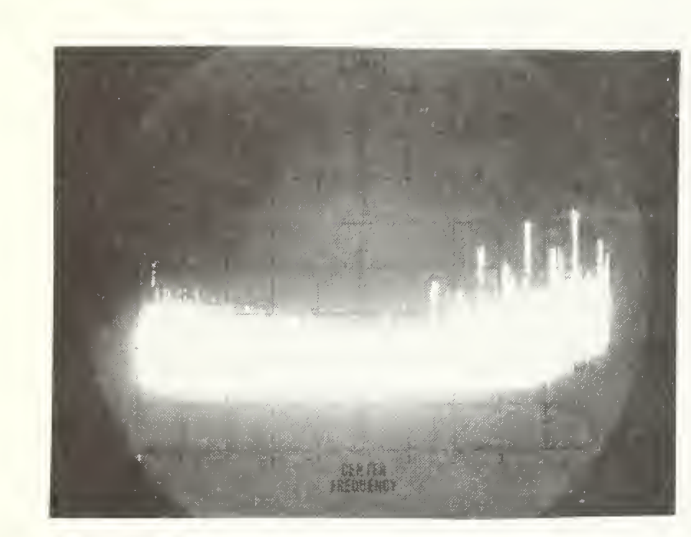


153
133
113
93
73

TEST 383
TIME 1104

50 FREQ. 75 KHz 100

FREQ. SCAN: 5 KHz/Div.



Bandwidth: 10 KHz

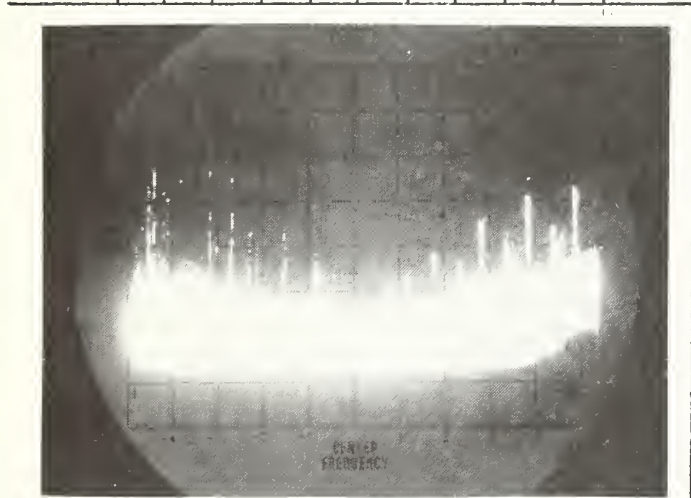


153
133
113
93
73

TEST 383
TIME 1104.5

LOCATION: SITE 4 TYPE TEST ESR DATE 8-1-72

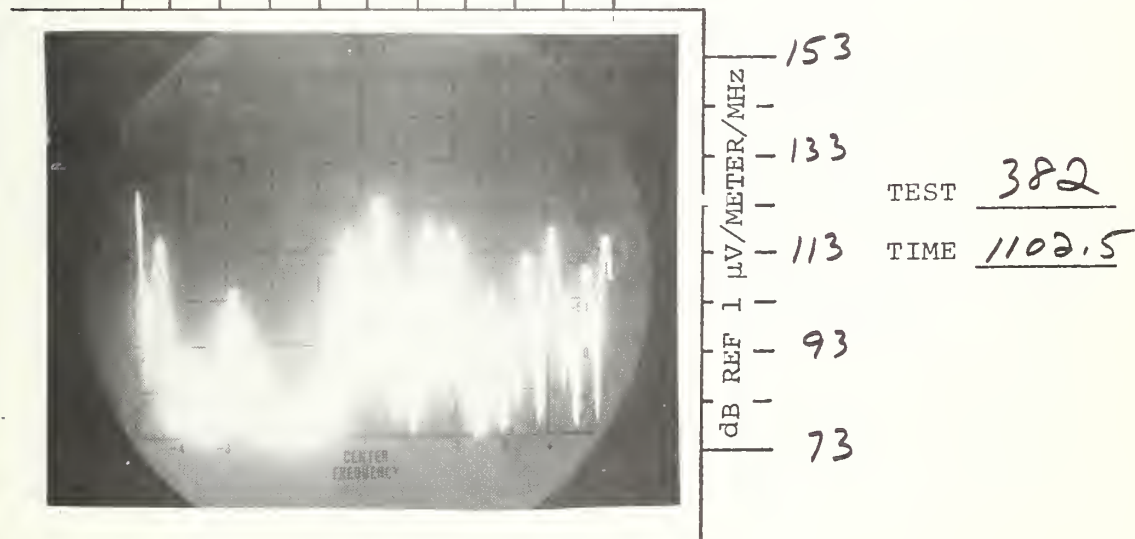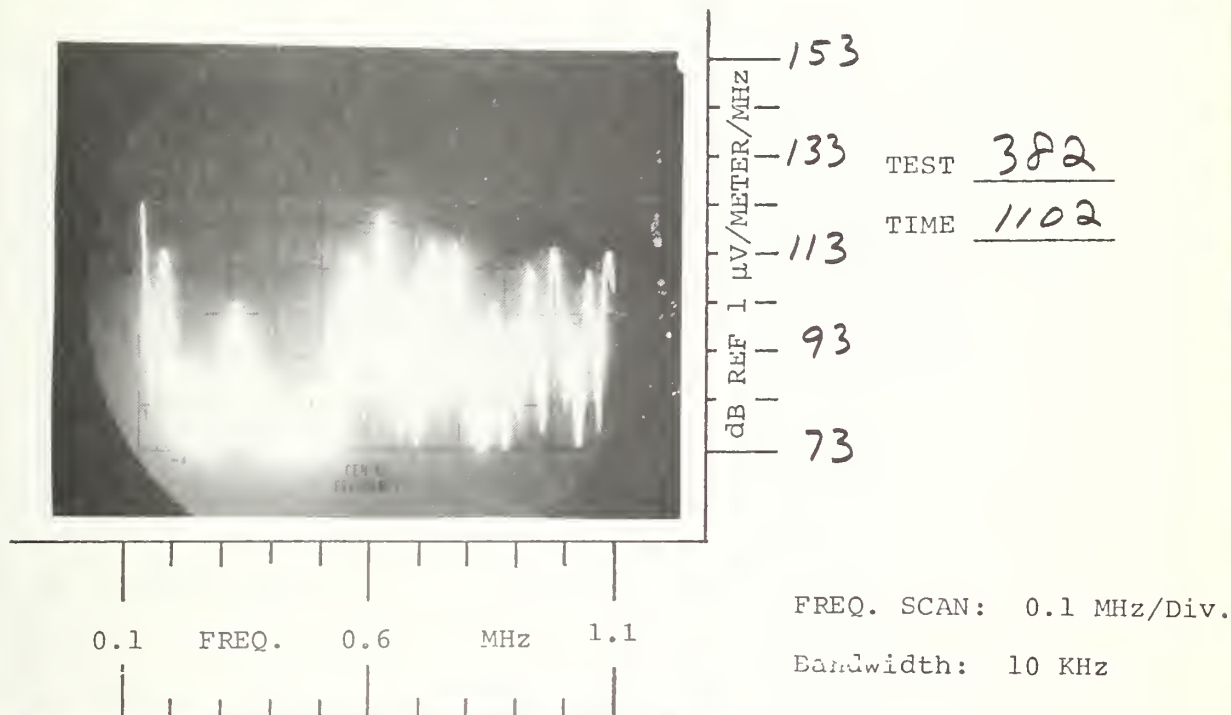

LOCATION: SITE 4 TYPE TEST ESR DATE 8-1-72

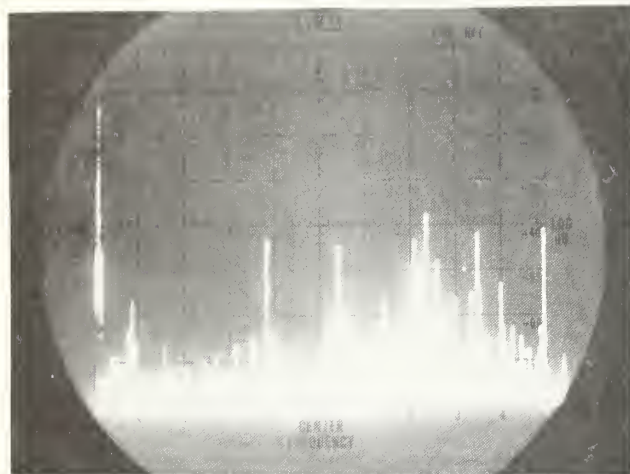


153
133
113
93
73

TEST 381
TIME 1100

1 FREQ. 11 MHz 21

FREQ. SCAN: 2MHz/Div.



Bandwidth: 10 KHz

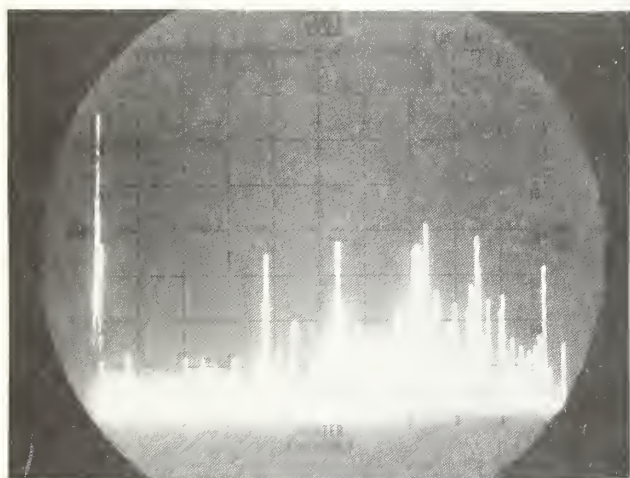


153
133
113
93
73

TEST 381
TIME 1100.5

LOCATION: SITE 4 TYPE TEST ESR E/W DATE 8-1-72

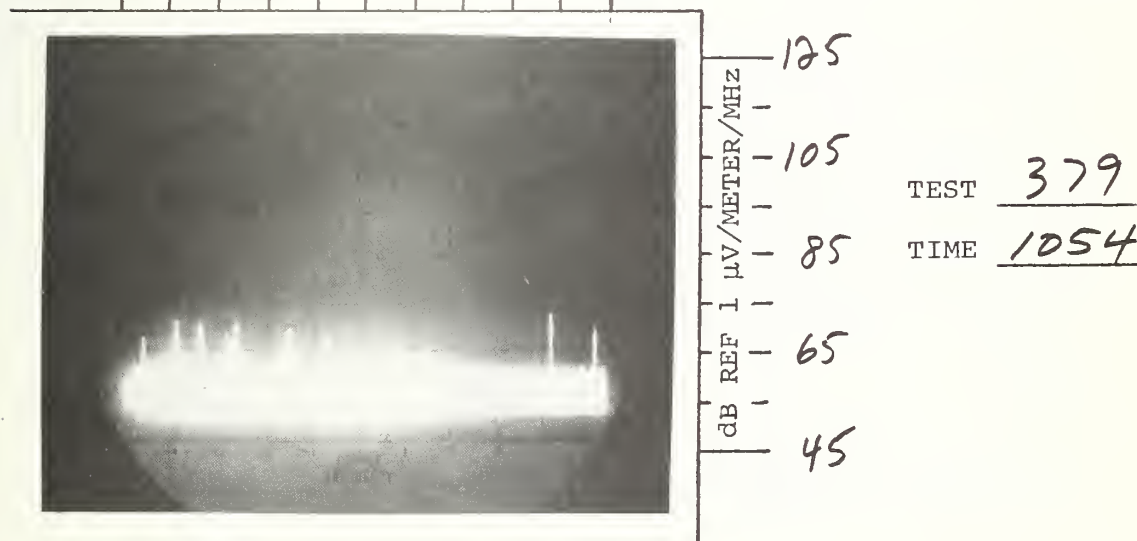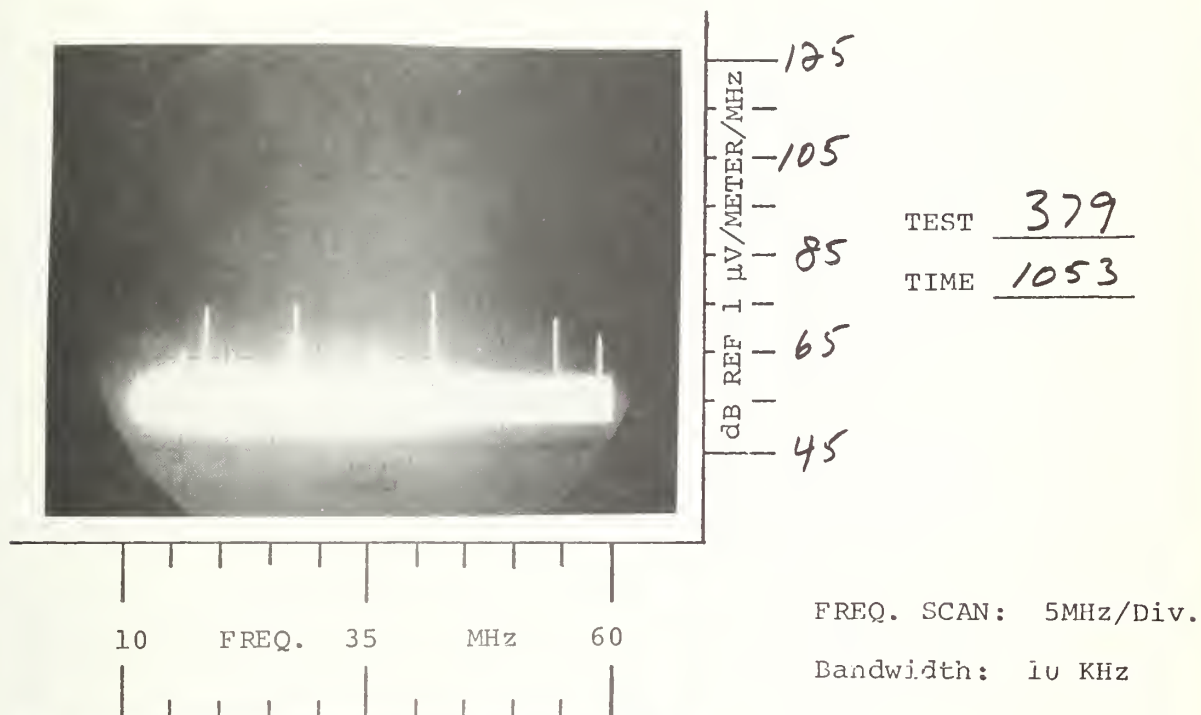

LOCATION: SITE 4 TYPE TEST ESR N/S DATE 8-1-72

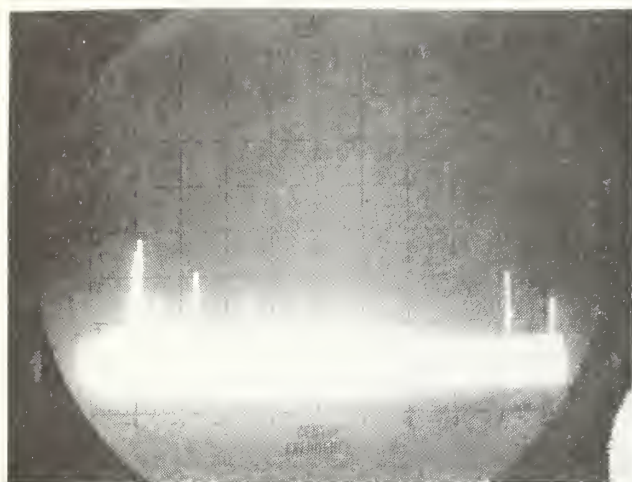


125
105
85
65
45
dB REF 1 μ V/METER/MHz

TEST 380
TIME 1054.5

10 FREQ. 35 MHz 60


FREQ. SCAN: 5MHz/Div.

Bandwidth: 10 KHz

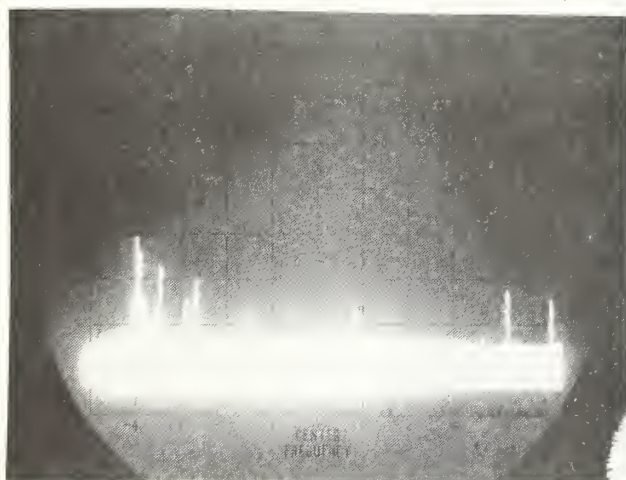

125
105
85
65
45
dB REF 1 μ V/METER/MHz

TEST 380
TIME 1055



DULLES SYSTEM

NAME: M. LammertO.D. READING ✓ MILESLE: RACHELHOUR METER READING ✓ HOURS8-1-72


Steps were made AT A+E as at time 6 sec 9 sec

or Subject: Activity Record for Eni test

nations:

8.00	Power is turned on RACHEL for 1 Vehicle mode
8.02	Begin 1st cycle on Rachel from A-E
8.02	LOST Power
8.20	Power back on cont cycle
8.22	Begin 2nd cycle on Rachel
8.25	Power tipped off
8.26	Power back on for 3rd cycle
8.28	Begin 4th cycle on Rachel
8.31	" 5th " " "
8.33	" 6th " " "
8.35	" 7th " " "
8.37	" 8th " " "
8.40	" 9th " " "
8.42	" 10th " " "
8.44	" 11th " " "
8.46	" 12th " " "
8.49	" 13th " " "
8.51	" 14th " " "
8.53	" 15th " " "
8.55	" 16th " " "
8.57	" 17th " " "
8.59	" 18th " " "
9.01	" 19th " " "
9.04	" 20th " " "
9.07	" 21st " " "
9.09	" 22nd " " "
9.12	" 23rd " " "
9.14	" 24th " " "
9.16	" 25th " " "
9.18	" 26th " " "

Form STS 5



DULINE SYSTEM



ATOR _____

O.D. READING _____ MILES

E _____

HOUR METER READING _____ HOURS

or Subject: _____

Activity Record for Eni Test

ations:

9:05	Begin 27th cycle on Rachel				
9:27	"	28	"	"	"
9:30	"	29	"	"	"
9:33	"	30	"	"	"
9:35	"	31	"	"	"
9:37	"	31	"	"	"
9:40	"	32	"	"	"
9:42	"	33	"	"	"
9:45	"	34	"	"	"
9:47	"	35	"	"	"
9:50	"	36	"	"	"
9:52	"	37	"	"	"
9:55	"	38	"	"	"
9:57	"	39	"	"	"
10:00	"	40	"	"	"
10:01	Power dropout (Breaker on vehicle) at Point E				
10:05	Reset breakers; back to Point A				
10:09	Point A to S switch area - Reset Door				
10:10	Back to Point A				
10:12	Begin 1st cycle on Rachel				
10:15	"	41	"	"	"
10:17	"	42	"	"	"
10:20	"	43	"	"	"
10:22	"	44	"	"	"

Form STS 5



DULLES SYSTEM



DATE

O.D. READING ✓ MILES

LR RACHEL

HOUR METER READING ✓ HOURS

8-1-72

or Subject: Activity Record for Eni test

ations:

10:27	Begin	47 th	cycle on Rachel		
10:30	"	48 "	" "	" "	" "
10:33	"	49 "	" "	" "	" "
10:36	"	50 "	" "	" "	" "
10:39	"	51 "	" "	" "	" "
10:41	"	52 "	" "	" "	" "
10:49	"	53 "	" "	" "	" "
10:52	"	54 "	" "	" "	" "
10:54	Rachel in	Sta A			
11:15	Begin	55 th	" "	" "	" "
11:17	"	56 "	" "	" "	" "
11:20	"	57 "	" "	" "	" "
11:23	"	58 "	" "	" "	" "
11:25	"	59 "	" "	" "	" "
11:27	TRIPED	POWER OFF			
11:27	POWER	BACK ON			
11:28	TRIPED	POWER OFF			
11:30	POWER	BACK ON			
11:31	Begin	60 th	cycle on Rachel		
11:34	"	61 "	" "	" "	" "
11:36	"	62 "	" "	" "	" "
11:38	"	63 "	" "	" "	" "
11:41	"	64 "	" "	" "	" "
11:44	"	65 "	" "	" "	" "
11:46	"	66 "	" "	" "	" "
11:49	"	67 "	" "	" "	" "
11:51	"	68 "	" "	" "	" "
11:53	"	69 "	" "	" "	" "



HE 18.5.A37
no. DOT-TSC-
UMTA-73-15

U

V.3

BORROWER

Form DOT F 17
FORMERLY FORM

DOT LIBRARY



00009268